



2020

Legende

-  Connecting thread (inch)
-  Application range (inch)
-  min. G/Min. at 1450 psi | min. G/Min. at 14'500/22'000 psi
-  Rotating nozzles
-  Thrust jet
-  Front jet
-  Measures [inch]
-  Weight [lb.]
-  Recycling
-  Maximum pressure (psi)
-  optional front jet
-  Pass (inch)

General terms of sale and delivery

General Information

enz® usa inc. / enz® technik ag offers a large range of high quality pipe cleaning tools. Since 1985, through innovative designs, we have assisted the sewer and pipe cleaning industry to remain on the forefront of new and creative technologies. This ensures superior quality and gives you, the customer, a product that is efficient and durable. We are interested in being your Partner and helping you find the best solution for your problems. With our know-how and efforts we will accept any new challenges to help keep you on the forefront of the newest technologies available.

The enz® products

All enz® tools are calibrated to Customer specific Pump and Hose specifications with our own JetCalc® Software to optimize the performance of your tool.

The enz® rotating nozzles are remarkable for their tremendous cleaning efficiency, which is based on a worldwide patented Drive and Brake jets design which increases and decreases the rotational speed with every half rotation therefore limiting the rotational speed.

The resulting pressure vibrations essentially contribute to the disintegration of the deposits. We also carry a complete line of Rotating Chain Scrapers and Percussion Milling Cutters. Our ceramic orifice inserts ensure that enz® tools have an outstanding durability. Our products are covered by International patents.

Warranty / Safety / Liability

enz® Pipe and Canal Cleaning Tools are designed for highest possible performance. The materials and the heat treatment processes are selected for wear resistance and long life. enz® is applying the most up to date manufacturing and quality assurance methods.

The enz® organization is ISO 9001 and ISO 14001 compliant.

General Tool Warranty: enz® warrants the quality of all tools supplied for the duration of 12 months from date of purchase. The warranty is limited to the replacement of faulty parts or the in house repair of faulty tools. No warranty is accepted if tools are not used or maintained in strict compliance with the operating manual supplied by enz®.

Warranty on ceramic nozzle inserts: The orifice diameters of enz® ceramic nozzles are warranted for wear for the duration of 5 years from the date of purchase when used with potable water. And 2 years from the date of purchase when used with recycled water. The warranty is limited to the free of charge exchange of worn inserts.

Warranty on Bulldog® nozzles: enz® warrants the internal mechanics of the Bulldog® nozzles for 1 year. No warranty on excessive wear of head or skid body due to prolonged or abusive use. Despite all due care, this documentation may contain errors. enz® technik ag and/or its Subsidiaries shall not be liable for any consequential damage. Technical modifications are reserved.

Our Distributor Network covers the United States and Canada

enz® usa inc

1585 Beverly Ct.

Unit 115

Aurora, IL 60502

Tel. 630-692-7880

Fax 630-692-7885

salesusa@enz.com

www.enz.com

STANDARD NOZZLES	7
ROTATING NOZZLES	31
ULTRA HIGH PRESSURE	69
WIRE ROPE AND CHAIN SCRAPERS	93
CUTTERS	105
ACCESSORIES	119

Standard cleaning nozzles


Made of wear-resistant, hardened steel, provided with front jet insert and blind plug (interchangeable). Angle of jet backwards, sturdy wall thickness, long service life and a minimum of wear and tear.

All nozzles from art. 30.038 onward are provided with steelceramic inserts.

Because of this, the efficiency is considerably higher compared with those nozzles with drilled holes and the service life is several times longer.

Applications

- Appropriate for removal of sludge deposits and coggings

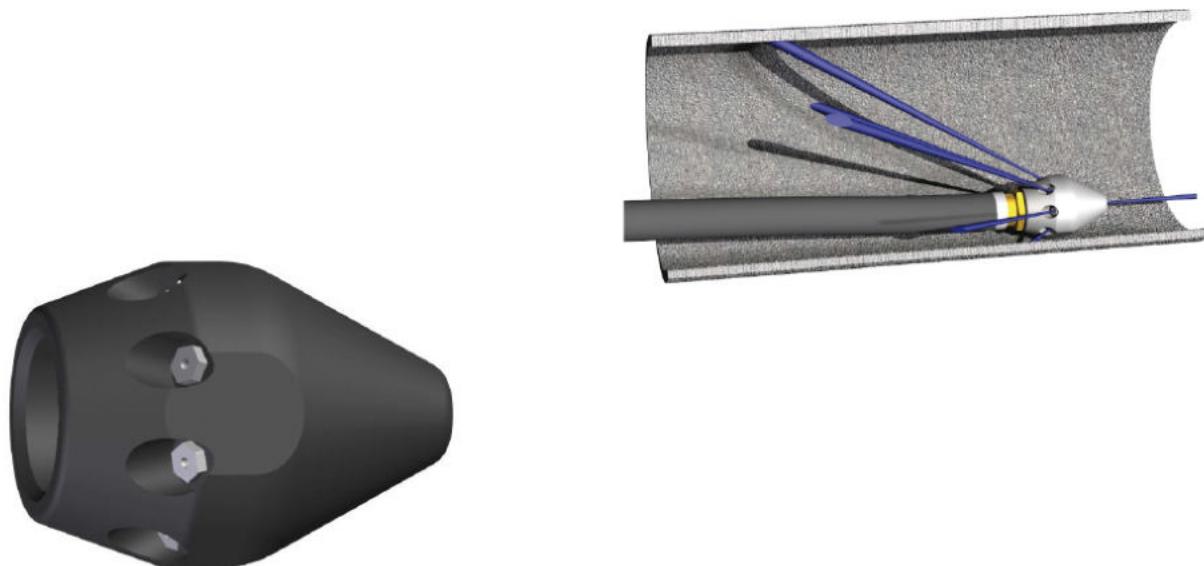

Silverline standard cleaning nozzles 1/8" NPT

30.012NSL10	1/8" NPT	0.8 - 4	2.6	4 x 0.75	-	0.5 x 0.7	0.02	-	5,000
30.012NSL10F	1/8" NPT	0.8 - 4	2.6	4 x 0.75	1 x 0.60	0.5 x 0.7	0.02	-	5,000
30.012NSL15	1/8" NPT	0.8 - 4	4	4 x 0.90	-	0.5 x 0.7	0.02	-	5,000
30.012NSL15F	1/8" NPT	0.8 - 4	4	4 x 0.90	1 x 0.60	0.5 x 0.7	0.02	-	5,000

Silverline standard cleaning nozzles 1/4" NPT

30.0253NSL10F	1/4" NPT	1.2 - 4.3	2.6	3 x 0.80	1 x 0.80	0.7 x 0.8	0.04	-	5,000
30.0253NSL15	1/4" NPT	1.2 - 4.3	4	3 x 1.10	-	0.7 x 0.8	0.04	-	5,000
30.0253NSL15F	1/4" NPT	1.2 - 4.3	4	3 x 1.10	1 x 0.80	0.7 x 0.8	0.04	-	5,000
30.0253NSL20F	1/4" NPT	1.2 - 4.3	5.3	3 x 1.20	1 x 0.80	0.7 x 0.8	0.04	-	5,000
30.0256NSL30	1/4" NPT	1.2 - 4.3	8	6 x 1.10	-	0.7 x 0.8	0.04	-	5,000
30.0256NSL30F	1/4" NPT	1.2 - 4.3	8	6 x 1.00	1 x 0.80	0.7 x 0.8	0.04	-	5,000

Silverline standard cleaning nozzles 3/8" NPT

30.038NSL40	3/8" NPT	1.6 - 5.9	11	6 x 1.30	-	1.0 x 0.9	0.15	-	5,000
30.038NSL60	3/8" NPT	2 - 6	16	6 x 1.50	-	1.0 x 0.9	0.13	-	5,000

Silverline standard cleaning nozzles 1/2"

30.050SL40	1/2"	2 - 8	11	6 x 1.2	-	1.2 x 1.1	0.26	-	5,075
30.050SL40F	1/2"	2 - 8	13	6 x 1.2	1 x 1.1	1.2 x 1.1	0.26	-	5,075
30.050SL70	1/2"	2 - 8	18	6 x 1.6	-	1.2 x 1.1	0.26	-	5,075
30.050SL70F	1/2"	2 - 8	21	6 x 1.6	1 x 1.4	1.2 x 1.1	0.26	-	5,075
35.050SL40	1/2"	2 - 8	11	6 x 1.1	3 x 1.00	1.2 x 1.1	0.26	-	5,075
35.050SL70	1/2"	2 - 8	18	6 x 1.4	4 x 1.1	1.2 x 1.1	0.26	-	5,075

Standard cleaning nozzles 3/8" NPT - 1 1/4"

30.038N	3/8" NPT	2 - 6	3	6 x M4	1 x M4	1.0 x 1.5	0.15	ok	5,000
30.050	1/2"	2 - 8	8	6 x M6	1 x M6	1.2 x 1.9	0.26	ok	5,075
30.050EI	1/2"	2 - 8	8	6 x M6	1 x M6	1.6 x 1.9	0.55	ok	5,075
30.075	3/4"	2 - 10	13	6 x M6	1 x M6	1.5 x 2.4	0.53	ok	5,075
30.100	1"	6 - 14	32	8 x M8	1 x M8	2.4 x 3.3	1.55	ok	3,625
30.100SP20	1"	6 - 14	32	8 x M8	1 x M8	2.4 x 3.3	1.55	ok	3,625
30.125	1 1/4"	8 - 16	53	8 x M8	1 x M8	2.7 x 4.1	3.02	ok	3,625
35.038N	3/8" NPT	2 - 6	3	6 x M4	4 x M4	1.0 x 1.6	0.15	ok	5,000
35.050	1/2"	2 - 8	13	6 x M6	3 x M4, 1 x M6	1.2 x 1.9	0.26	ok	5,075
35.050EI	1/2"	2 - 8	13	6 x M6	4 x M4	1.6 x 1.9	0.55	ok	5,075
35.100	1"	6 - 14	32	8 x M8	4 x M8	2.4 x 3.3	1.55	ok	3,625

Camera pull nozzle

32.038	3/8"	3 - 8	11	4 x M4	2.2 x 1.5 x 1.5	0.7	ok	5000	
32.038N	3/8"NPT	3 - 8	11	4 x M4	2.2 x 1.5 x 1.5	0.7	ok	5000	

Grenade-bomb

This enz® jet nozzle is made of wear-resistant hardened steel. The "grenade" and the "bomb" are joined in the same nozzles. Different jet angles perform together strong traction and effective cleaning. The high efficiency is reached by appropriate water guidance. Applications

- For removal of loose rubble stone, gravel and soft deposits
- For a previous cleaning before the use of chain flail head or cutter



Grenade-bombs 1/4" NPT

40.025N-10	1/4" NPT	1 - 4	3	4 x 0.80	1 x M4	1.0 x 1.6	0.22	-	5,075
40.025N-30	1/4" NPT	1 - 4	8	4 x 0.80	1 x M4	1.0 x 1.6	0.22	-	5,075
40.025N-40	1/4" NPT	1 - 4	10	4 x 0.80	1 x M4	1.0 x 1.6	0.22	-	5,075

Grenade-bombs 3/8" NPT - 3/4"

40.038N	3/8" NPT	2 - 4	3	6 x M6	1 x M6	1.5 x 3.2	1.15	ok	5,075
40.050	1/2"	2 - 6	8	6 x M8	1 x M8	1.9 x 3.5	1.89	ok	5,075
40.050-SP10	1/2"	3 - 6	8	6 x M8	1 x M8	1.9 x 3.5	1.9	ok	5,075
40.075A	1/2"	3 - 8	26	8 x M8	1 x M8	2.3 x 4.6	3.37	ok	5,000
40.075A-SP30	1/2"	3 - 8	26	8 x M8	1 x M8	2.3 x 4.6	3.37	ok	5,075
40.075B	3/4"	3 - 8	26	8 x M8	1 x M8	2.3 x 4.6	3.37	ok	5,000
40.075B-SP30	3/4"	3 - 8	26	8 x M8	1 x M8	2.3 x 4.6	3.37	ok	5,075

Grenade-bombs 1"

40.100A	1"	5 - 12	40	10 x M10	1 x M10	3.1 x 6.9	10.80	ok	3,625
40.100A-SP10	1"	5 - 12	40	10 x M10	1 x M10	3.1 x 6.9	10.80	ok	3,625
40.100B	1"	6 - 16	40	10 x M10	1 x M10	3.9 x 8.1	17.64	ok	3,625

Grenade-bombs 1 1/4"

40.100C	1 1/4"	6 - 16	53	10 x M10	1 x M10	3.9 x 7.7	17.64	ok	3,625

									
40.125A	1 1/4"	12 - 24	79	10 x M10	1 x M10	4.3 x 8.7	23.15	ok	3,625

Accessory and wearing parts grenade-bombs

			
40.1004A	Cage with skids (for grenade-bombs up to 10.3 lbs)	7 - 12	2.91
40.1004B	Cage with skids (for grenade-bombs up to 17.8 lbs)	8 - 16	3.35

360° Grenade-bombs

This enz® jet nozzle is made of wear-resistant hardened steel. The "grenade" and the "bomb" are joined in the same nozzles. Different jet angles perform together strong traction and effective cleaning. The high efficiency is reached by appropriate water guidance. For optimal all-around cleaning all nozzles are equipped with fan-jet ceramic-steel inserts.

Applications

- For removal of loose rubble stone, gravel and soft deposits
- For a previous cleaning before the use of chain flail head or cutter
- For an all-around cleaning



360° Grenade-bombs



360° Grenade-bombs 1/2" - 3/4"



42.050	1/2"	2 - 6	8	3 x M8, 3 x FanJet M8	1 x M8	1.9 x 3.5	1.89	ok	5,075
42.075A	1/2"	3 - 8	26	4 x M8, 4 x FanJet M8	1 x M8	2.3 x 4.6	3.37	ok	5,075
42.075B	3/4"	3 - 8	26	4 x M8, 4 x FanJet M8	1 x M8	2.3 x 4.6	3.37	ok	5,075

360° Grenade-bombs 1" - 1 1/4"



42.100A	1"	5 - 12	50	12 x M10	1 x M10	3.1 x 6.9	10.2	ok	3600
42.100B-12	1"	6 - 16	50	12 x M10	1 x M10	3.9 x 7.2	17	ok	3,600
42.100B-18	1"	6 - 16	80	18 x M10	1 x M10	3.9 x 7.7	17	ok	3,600
42.100C-12	1 1/4"	6 - 16	50	12 x M10	1 x M10	3.9 x 8.1	17	ok	3,600
42.100C-18	1 1/4"	6 - 16	80	18 x M10	1 x M10	3.9 x 8.1	17	ok	3,600
42.125A	1 1/4"	12 - 24	80	10 x M10	1 x M10	4.3 x 8.7	23.15	ok	3,625

Drainage channel nozzles

The enz® drainage channel nozzle is suited for cleaning drainage gutters and systems, for example along motorways, in pedestrian zones or parkings.

The 0° jets deploy all the cleaning power to the rear, thus preventing contamination of the environment or passing vehicles.

Advantages of the drainage channel nozzle

- No discharge of water from drainage channels
- Optimal flushing performance
- No cleaning of the area after the fact
- The nozzle functions in any position

Applications

- Cleaning of channels with gutters, flushing out of debris, gravel, leaves, straw, etc.



Drainage channel nozzles 1/2" - 1 1/4"




									
40.050-SP0	1/2"	3 - 8	13	6 x M8	1 x M8	1.9 x 3.5	1.75	ok	5,075
40.075A-SP0	1/2"	3 - 8	26	8 x M8	1 x M8	2.3 x 4.6	3.3	ok	5,075
40.075B-SP0	3/4"	3 - 8	26	8 x M8	1 x M8	2.3 x 4.6	3.3	ok	5,075
40.100A-SP0	1"	6 - 12	40	10 x M10	1 x M10	3.1 x 6.9	10.4	ok	3,625
40.125A-SP0	1 1/4"	12 - 34	73	10 x M10	1 x M10	4.3 x 8.7	23.15	ok	3,625

Chisel point nozzles

Concentrated powerful advance by means of 4 front jet nozzles. The sharp edges cut, break and penetrate through every kind of blockage. Made of wear-resistant, hardened steel. All nozzles from art. 60.050 onward are provided with ceramic inserts. Because of this, the efficiency is considerably higher compared with those nozzles with drilled holes and the service life is several times longer.

Applications

- Penetrating of completely clogged pipes
- Opening of interlaced roots
- Opening of frozen pipelines
- Flushing out at hydraulic thrust boring

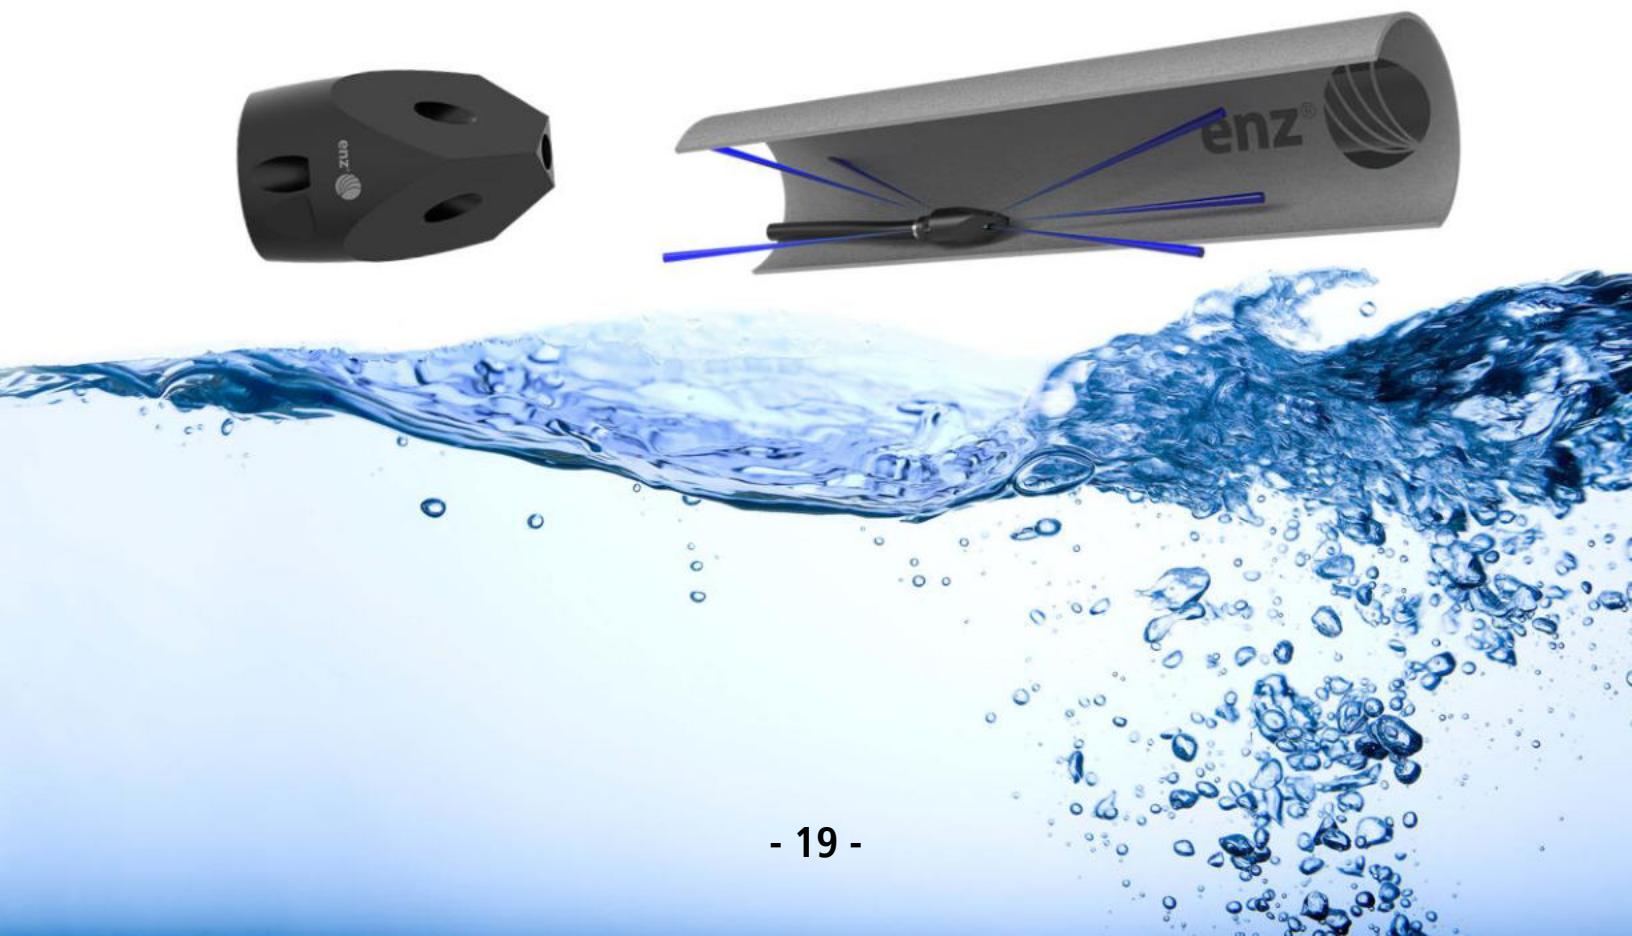

Silverline chisel point nozzles 1/8" NPT - 3/4"

									
60.012NSL15	1/8" NPT	1 - 2	4	3 x 0.95	4 x 0.50	0.6 x 1.0	0.04	-	5,075
60.025NSL15	1/4" NPT	1 - 2	4	3 x 0.90	4 x 0.60	0.8 x 1.3	0.06	-	5,075
60.025NSL30	1/4" NPT	1 - 2	8	3 x 1.35	4 x 0.70	0.7 x 1.3	0.06	-	5,075
60.038NSL40	3/8" NPT	1 - 4	11	3 x 1.45	4 x 0.70	1.0 x 1.7	0.15	-	5,075
60.038NSL60	3/8" NPT	1 - 4	16	3 x 1.70	4 x 0.80	1.0 x 1.6	0.15	-	5,075
60.050SL100	1/2"	2 - 6	26	3 x 2.40	4 x 1.10	1.3 x 2.2	0.31	-	5,075
60.050SL40	1/2"	2 - 6	11	3 x 1.50	4 x 0.80	1.3 x 2.2	0.31	-	5,075
60.050SL70	1/2"	2 - 6	18	3 x 1.80	4 x 0.90	1.3 x 2.2	0.31	-	5,075
60.075SL160	3/4"	3 - 10	42	3 x 2.70	4 x 1.80	1.5 x 3.1	0.71	-	5,075
60.075SL200	3/4"	3 - 10	53	3 x 3.10	4 x 1.90	1.5 x 3.1	0.71	-	5,075

Chisel point nozzles 3/8" NPT - 1 1/4"

									
60.038N	3/8" NPT	1.1 - 3.9	8	3 x M4	4 x M4	1 x 1.7	0.18	ok	5,000
60.050	1/2"	2 - 6	13	3 x M6	4 x M4	1.3 x 2.2	0.31	ok	5,000
60.075	3/4"	2 - 10	26	3 x M6	4 x M4	1.5 x 3.2	0.71	ok	5,075
60.100	1"	4 - 12	40	6 x M6	4 x M6	1.9 x 3.5	1.21	ok	3,625
60.100L	1"	6 - 16	53	6 x M10	4 x M8	2.7 x 7.4	5.95	ok	3,625
60.100L80	1"	6 - 20	53	6 x M10	4 x M8	3.1 x 8.6	10.32	ok	3,625
60.125	1 1/4"	6 - 16	53	6 x M6	4 x M6	2.3 x 3.9	2.12	ok	3,600
60.125L	1 1/4"	8 - 32	79	6 x M10	4 x M8	3.9 x 10.2	18.52	ok	3,625

Chisel point nozzles with centre spire 1/2" - 1 1/4"

									
61.050	1/2"	2 - 6	13	3 x M6	3 x M4	1.3 x 3.2	0.32	ok	5,075
61.075	3/4"	2 - 10	26	3 x M6	3 x M4	1.5 x 4.1	0.72	ok	5,075
61.100	1"	4 - 12	40	6 x M6	3 x M6	1.9 x 4.9	1.24	ok	3,625
61.100L	1"	6 - 16	53	6 x M10	3 x M8	2.7 x 8.7	5.96	ok	3,625
61.100L80	1"	6 - 20	53	6 x M10	3 x M8	3.1 x 10.2	10.37	ok	3,625

61.125	1 1/4"	6 - 16	53	6 x M6	3 x M6	2.3 x 5.2	2.07	ok	3,625
61.125L	1 1/4"	8 - 32	79	6 x M10	3 x M8	3.9 x 11.8	18.57	ok	3,625

Accessory and wearing parts chisel point nozzles



0061.1004		Centre spire for Pointed Nozzle 60.100	M6	0.4 x 1.3
0061.1254		Centre spire for Pointed Nozzle 60.100L80,	M8	0.4 x 2.0
0061.0504		Centre spire for Pointed Nozzle 60.050	M4	0.2 x 1.0

Guiding nozzles standard

The enz® guiding nozzles standard were developed specifically for targeted cleaning of pipe inlets. They are used in searching for connections in ground lines and can thus prevent the need for cleaning via a household connection, for example. Entrance into the connection is made using a head nozzle on a flexible hose.

Applications

- For removal of loose rubble stone, gravel and soft deposits

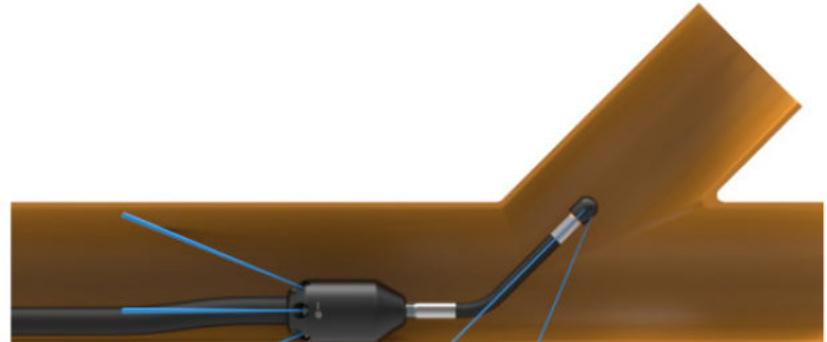

Guiding nozzles standard 1/2"



17.050-001	1/2"	2.4 - 5.9	13	6 x M8	-	1.89 x 10.51	2.09	-	5,075

Accessory and wearing parts guiding nozzles standard



95.001	Steering Set to 17.040A/44AE	0.25

Flounder

This enz® tool is especially suited to clean flat pipes and channels. The flat design combined with the rounded corners and edges provides the tool with ideal gliding properties.

Ceramic inserts and an optimized flow reversal create compact and aggressive water jets.

The low and compact design facilitates access to a wide variety of pipes and channels.

Applications

- Appropriate for removing mud and loose rubble in flat pipes and channels, e.g. run-off gutters



Flounder 1/2" - 1 1/4"

70.050	1/2"	6 - 10	16	S1: 2 x M8, S2: 2 x M8	7.7 x 3.5 x 1.4	5.73	ok	3,625
70.075	3/4"	8 - 16	26	S1: 2 x M8, S2: 4 x M8	7.7 x 3.9 x 2.0	7.06	ok	3,625
70.100	1"	12 - 24	43	S1: 2 x M10, S2: 2 x M10, S3: 4 x M10	13.4 x 6.3 x 2.2	27.12	ok	3,625
70.125	1 1/4"	16 - 32	66	S1: 2 x M10, S2: 4 x M10, S3: 4 x M10	15.0 x 7.4 x 2.8	41.89	ok	3,625

enz®-Bulldozer


The enz®-Bulldozer nozzles for channels and pipes (8 inch and larger) are setting new performance benchmarks. The tools in the new Scraper system are equipped with a water chamber. The chamber reduces the water turbulence, which is then supplied to the nozzle inserts. The result is a compact, aggressive and most effective water jet not attained up to now.

Characteristics

- Enormous flushing capacity = reduced water consumption
- Big water acceleration = superb flushing effect
- No swimming-up of the tool = very good cleaning of ground in channels with large water passage

Applications

- The low and compact construction allows various uses in heavily polluted pipes

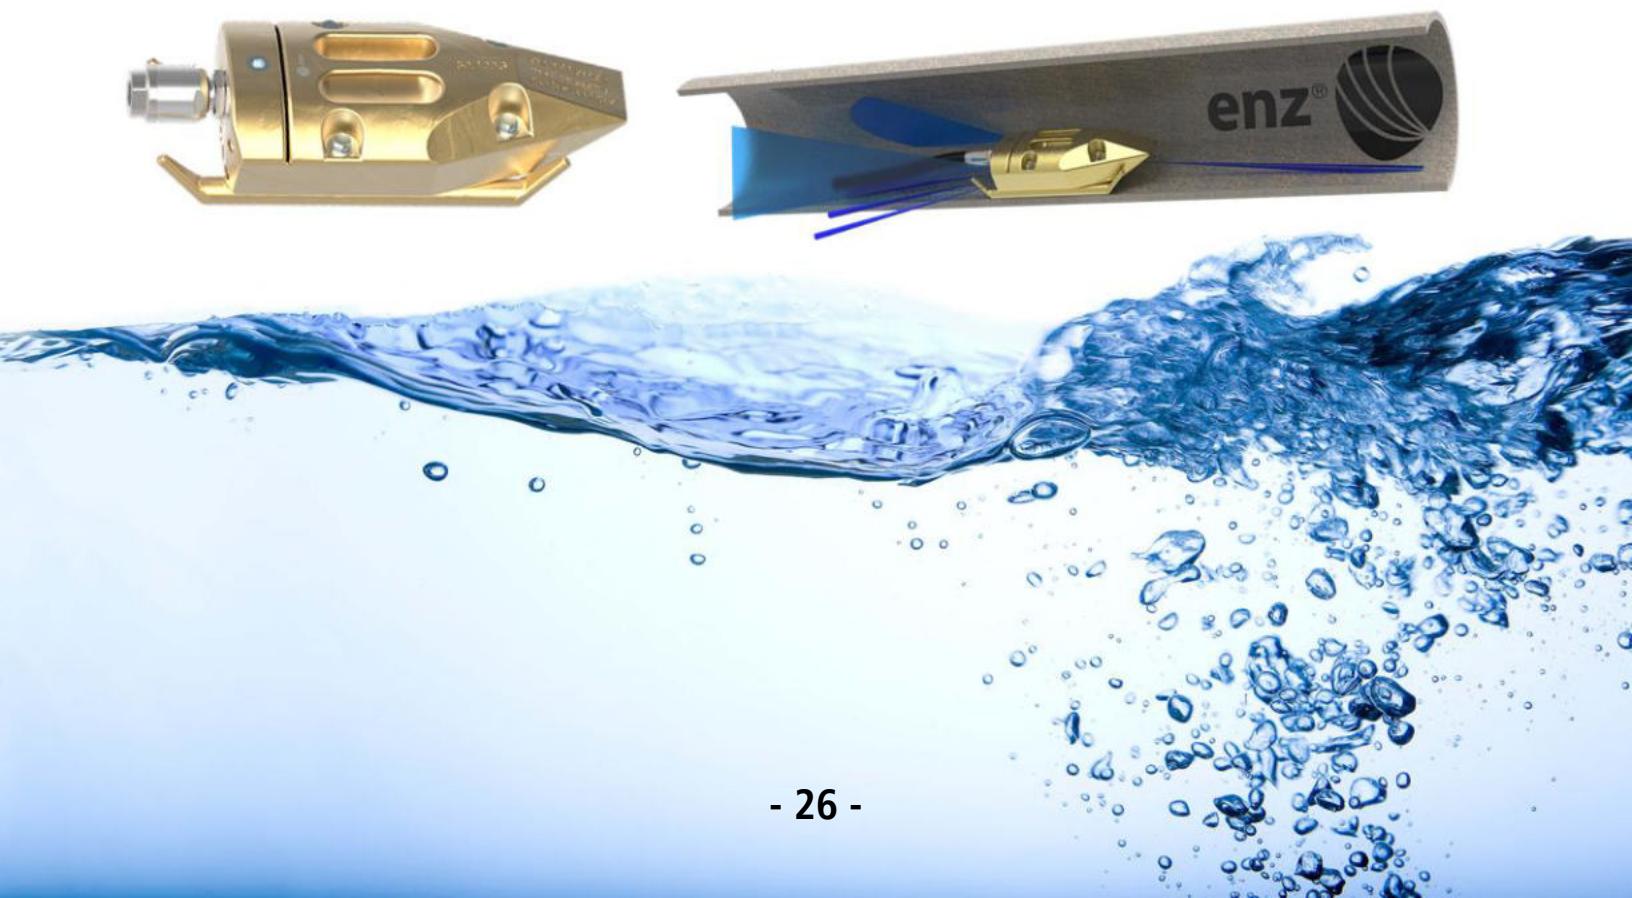

enz®-Bulldozer 3/4" - 1 1/4"



50.075G	3/4"	8 - 20	26	4 x M10, 2 x FanJet M10	1 x M10	15.8 x 5.9 x 4.3	26.46	ok	3,625
50.100G	1"	12 - 59	40	6 x M10, 2 x FanJet M10	1 x M10	19.1 x 7.9 x 5.1	56.22	ok	3,625
50.125G	1 1/4"	16 - 98	79	6 x M10, 2 x FanJet M10	1 x M10	23.8 x 9.8 x 6.5	82.67	ok	3,625

enz®-Bulldozer 1 1/2"



50.150	1 1/2"	20 - 177	106	8 x M10, 2 x FanJet M10	1 x M10	27.8 x 11.8 x 6.7	119.05	ok	3,625

Accessory and wearing parts enz®-Bulldozer



0050.1253G		Skid for Scraper 1 1/4"	9.68
0050.0753G		Skid for Scraper 3/4"	2.59
0050.0755G		Roll bar	8 - 20
0050.1255G		Roll bar	16 - 100
50.10012G		Enlargement plate with screws for 50.100G	14.55
0050.1003G		Skid for Scraper 1"	5.95
0050.15032		Skid for Scraper 1 1/2"	11.60
0050.07510		Bulldozer flat skid 3/4"	13.01
0050.10010G		Bulldozer flat skid 1"	14.33


0050.12510G		Bulldozer flat skid 1 1/4"	29.98
0050.10012G		Enlargement plate for 50.100G	14.55
0050.1005G		Roll bar	11.7 x 10.8 x 9.1 6.20

Ejector nozzles

These enz® tools are outstanding in their enormous flushing capacity. Their main application is cleaning large fully surcharged pipes and drains bigger than Ø19 inch. The specific arrangement of the nozzle inserts ensures that cleaning is done carefully because the nozzle jets do not work directly against the pipe wall. As a result, this tool is also appropriate for cleaning older channel systems. It integrates the heavy water flow in pipes and channels into the flushing and cleaning process. In this way the water volume usable for cleaning is enhanced to five times the actual pump capacity. A pump of 80 gpm increase the flushing capacity of the nozzle to 400 gpm. As a result enormous quantities of sand and gravel can be removed fast and efficiently.

Applications

- For enormous flushing capacity

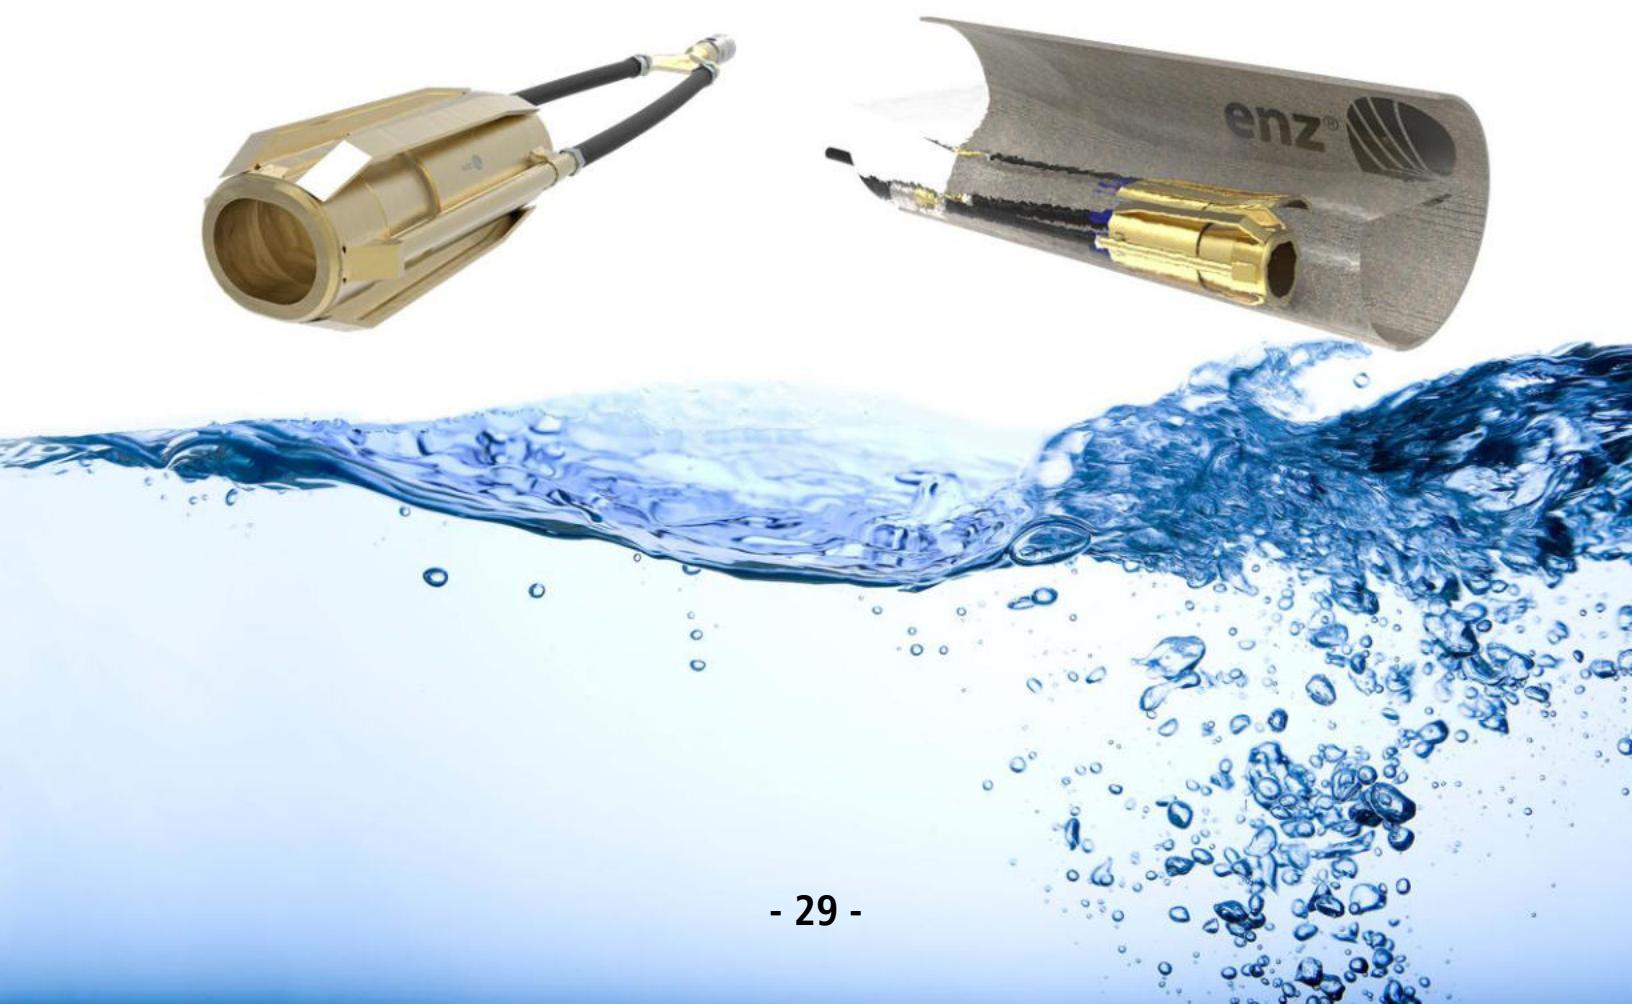

Ejector nozzles 1" - 1 1/4"

								 max
80.100	1"	8 - 20	53	6 x M6	11.8 x 6.3 x 4.7	16.31	ok	2,900
80.100A	1"	16 - 59	79	6 x M10	16.0 x 10.2 x 9.8	49.6	ok	2,900
80.125B	1 1/4"	24 - 79	79	10 x M10	18.9 x 11.8 x 9.8	68.34	ok	2,900
80.125D	1 1/4"	39 - 118	160	10 x M10	22.8 x 14.2 x 12.2	100.31	ok	2,900

Accessory and wearing parts Ejector nozzles


				
0080.10002		Y - Connection 1" - 2 x 1/2"	1" - 2 x 1/2"	0.99
0080.100A02		Y - Connection 1" - 2 x 3/4"	1" - 2 x 3/4"	1.01
0080.125B02		Y - Connection 1 1/4" - 2 x 1"	1 1/4" - 2 x 1"	3.00
0080.10003		HP hose 1/2" - for 80.100	1/2"	4.19
0080.100A03		HP hose 3/4" - for 80.100A	3/4"	4.19
0080.125B03		HP hose 1" - for 80.100B/D	1"	4.19
0080.10001		Swivel Joint for 80.100/A	1"	2.09
0080.12501		Swivel Joint for 80.125B/ D	1 1/4"	3.40

RGS nozzles

The radial rotating nozzles enz® are equipped with 4 radial jets of 75° for the pipe cleaning and 3 thrust jets for the advance which at the same time flush away the loosened residues. As a result, pipe ducts of all kinds, even with vertical borings etc., will be cleaned. The moving part of the enz® nozzle rotates at a limited speed. These water jets hit the pipe wall directly with great impact, striking every corner, every dead end, every lateral pipe.

Applications

- Cleaning of drain pipes
- Cleaning of lateral pipes
- Removal of solid deposits

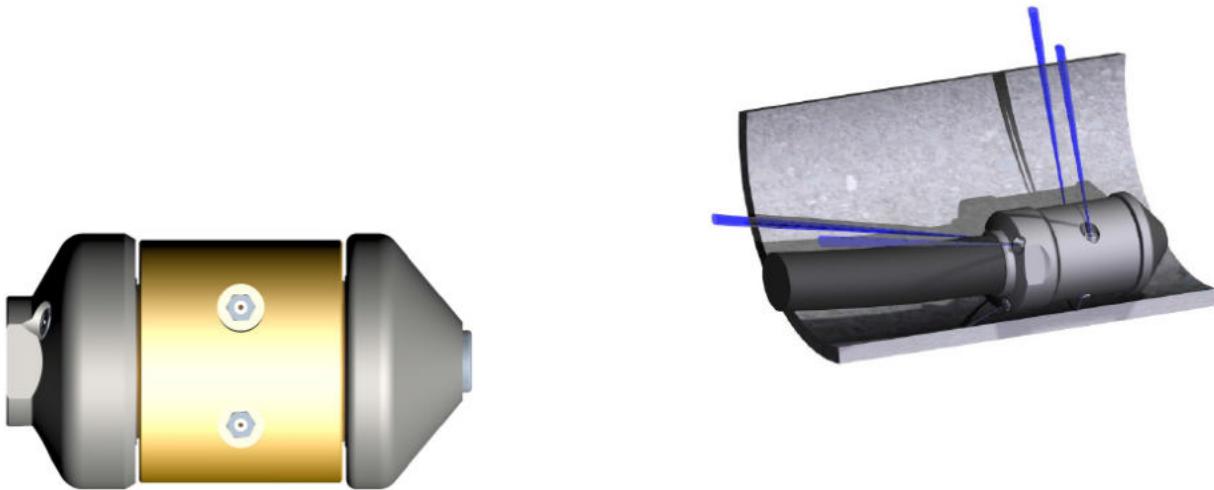

RGS nozzles 1/4" NPT - 1 1/4"




											*	
01.028N	1/4" NPT	2 - 4	5	4 x M4	3 x M4	*	1.1 x 2.2	0.44	-	5,075		
01.040	1/2"	3 - 6	11	4 x M6	3 x M6	*	1.6 x 3.2	1.24	-	5,075		
01.050A	1/2"	4 - 8	18	4 x M6	3 x M6	*	2.0 x 3.9	2.43	-	5,075	*	
01.050B	3/4"	4 - 8	18	4 x M6	3 x M6	*	2.0 x 3.9	2.43	-	3,625	*	
01.060	1"	4 - 12	26	4 x M8	3 x M8	*	2.4 x 4.4	3.53	-	3,625		
01.100A	1"	8 - 24	53	4 x M10	3 x M10	*	2.9 x 7.1	16.31	-	3,625		
01.100B	1 1/4"	8 - 24	53	4 x M10	3 x M10	*	3.9 x 7.1	16.31	-	3,625		

HRH nozzles

The semi-radial rotating enz® nozzles with their 4 retroacting cutting-jets at an angle of approx. 45° cause simultaneously the cleaning procedure and the thrust for the forward move of the tool i.e. the jets combine rotation and thrust in one function resulting in a low water consumption. With sufficient water capacity, optional thrust jets can facilitate upward cleaning.

Applications

- Cleaning of pipes before TV-recordings
- To remove mineral deposits in pipes
- To remove roots up to Ø 0.2 inch

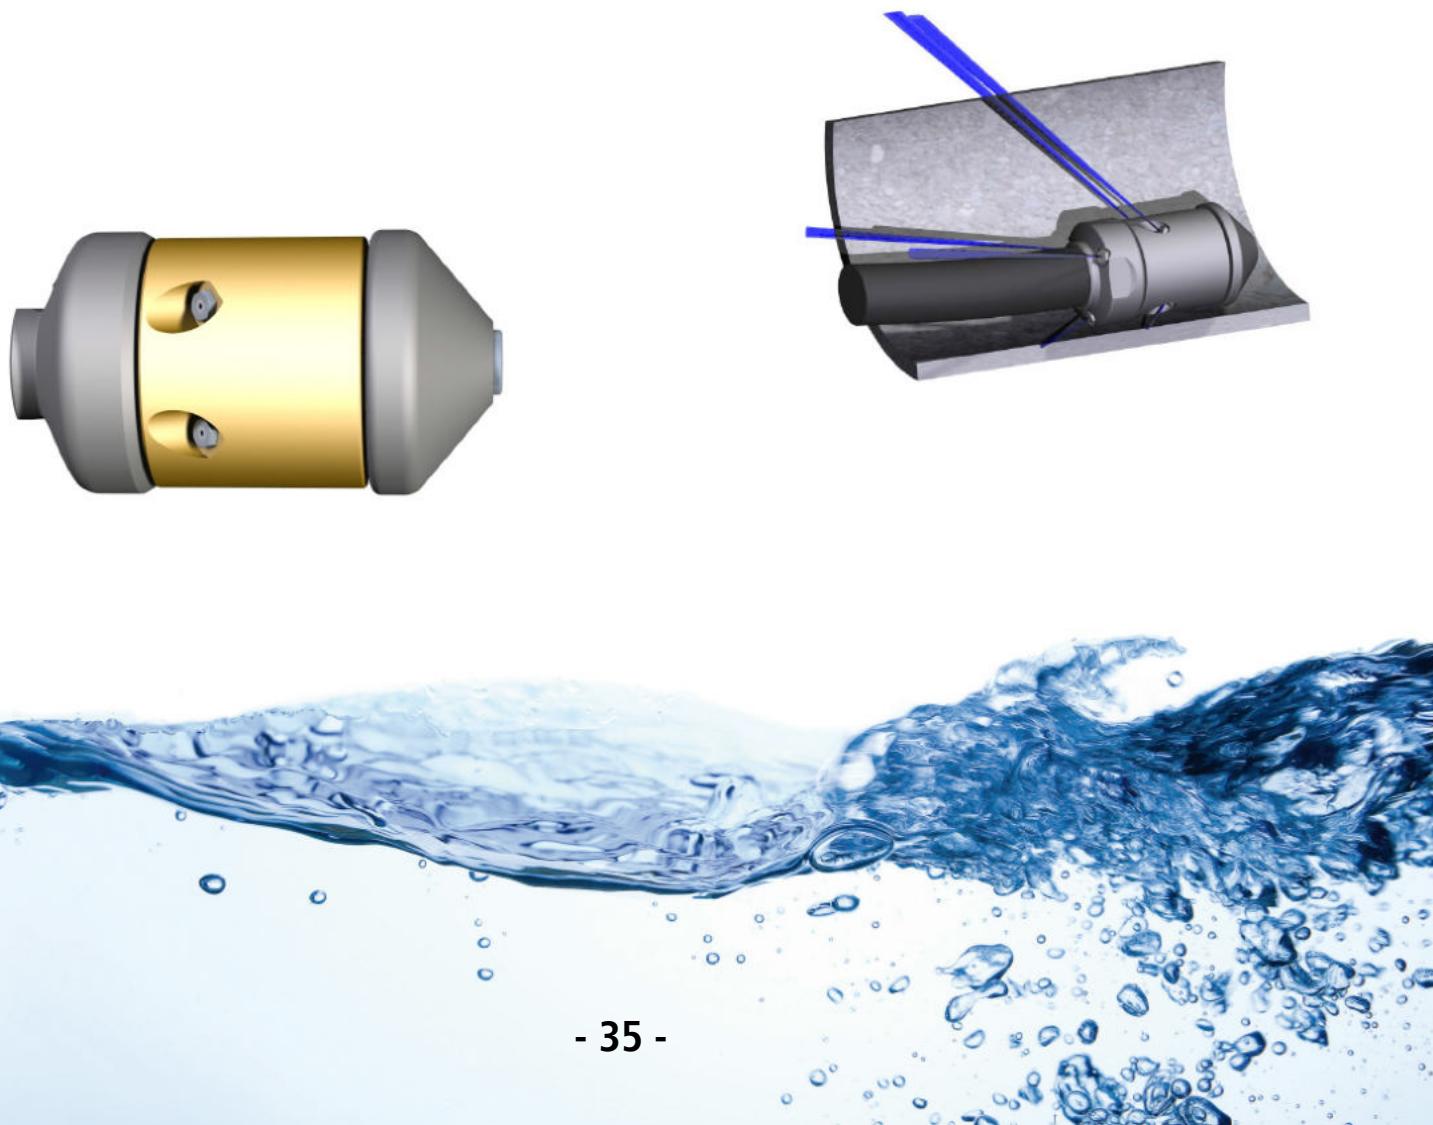

HRH nozzles 1/8" NPT - 3/4"



											*
02.016A08N	1/8" NPT	1 - 2	3	2 x 0.8 - 2 x 0.7	-	*	0.6 x 1.2	0.07	-	5,075	
02.016A13N	1/8" NPT	1 - 2	3	2 x 1.3 - 2 x 1.1	-	*	0.6 x 1.2	0.07	-	5,075	
02.016B08N	1/4" NPT	1 - 2	3	2 x 0.8 - 2 x 0.7	-	*	0.6 x 1.2	0.07	-	5,075	
02.016B13N	1/4" NPT	1 - 2	3	2 x 1.3 - 2 x 1.1	-	*	0.6 x 1.2	0.07	-	5,075	
02.022BN	1/4" NPT	1 - 4	3	45°: 4 x M4	-	-	0.9 x 1.6	0.2	-	5,000	
02.028AN	1/4" NPT	2 - 4	2	4 x M4	-	*	1.1 x 2.2	0.45	-	5,075	
02.028ASN	1/4" NPT	2 - 4	3	4 x M4	3 x M4	*	1.1 x 2.2	0.45	-	5,075	
02.028BN	3/8" NPT	2 - 4	2	4 x M4	-	*	1.1 x 2.2	0.45	-	5,075	
02.040A	1/2"	3 - 6	4	4 x M6	-		1.6 x 3.2	1.24	-	5,075	
02.040AS	1/2"	3 - 6	11	4 x M6	3 x M6		1.6 x 3.2	1.24	-	5,075	
02.040B	3/4"	3 - 6	4	4 x M6	-		1.6 x 3.2	1.24	-	3,625	
02.050A	1/2"	4 - 8	11	4 x M6	-		2.0 x 3.9	2.43	-	5,075	*
02.050AS	1/2"	4 - 8	11	4 x M6	3 x M6		2.0 x 3.9	2.43	-	5,075	*
02.050B	3/4"	4 - 8	11	4 x M6	-		2.0 x 3.9	2.43	-	3,625	*
02.050BS	3/4"	4 - 8	11	4 x M6	3 x M6		2.0 x 3.9	2.43	-	3,625	*

HRH nozzles 1" - 1 1/4"




											*
02.060	1"	4 - 12	16	4 x M8	3 x M8	*	2.4 x 4.4	3.53	-	3,625	
02.100A	1"	8 - 24	53	4 x M10	3 x M10	*	2.9 x 7.1	16.31	-	3,625	
02.100B	1 1/4"	8 - 24	53	4 x M10	3 x M10	*	3.9 x 7.1	16.31	-	3,625	

HRV nozzles

enz® nozzles with forward impact angle of approx. 45° on the pipe wall as well as a front jet (on request) and 3 retro-thrust jets cause a cork-screw-like advance through the clogged pipe. While the front nozzles loosen and the semi-radial nozzles disintegrate the residues, the thrust nozzles are driving the nozzle head forwards and simultaneously pushing the waste material backwards.

Applications

- Core-flushing of the steel pipes during hydraulic thrust-boring
- Cleaning of house connecting pipework from inside to the drain system
- Removal of ice in manholes

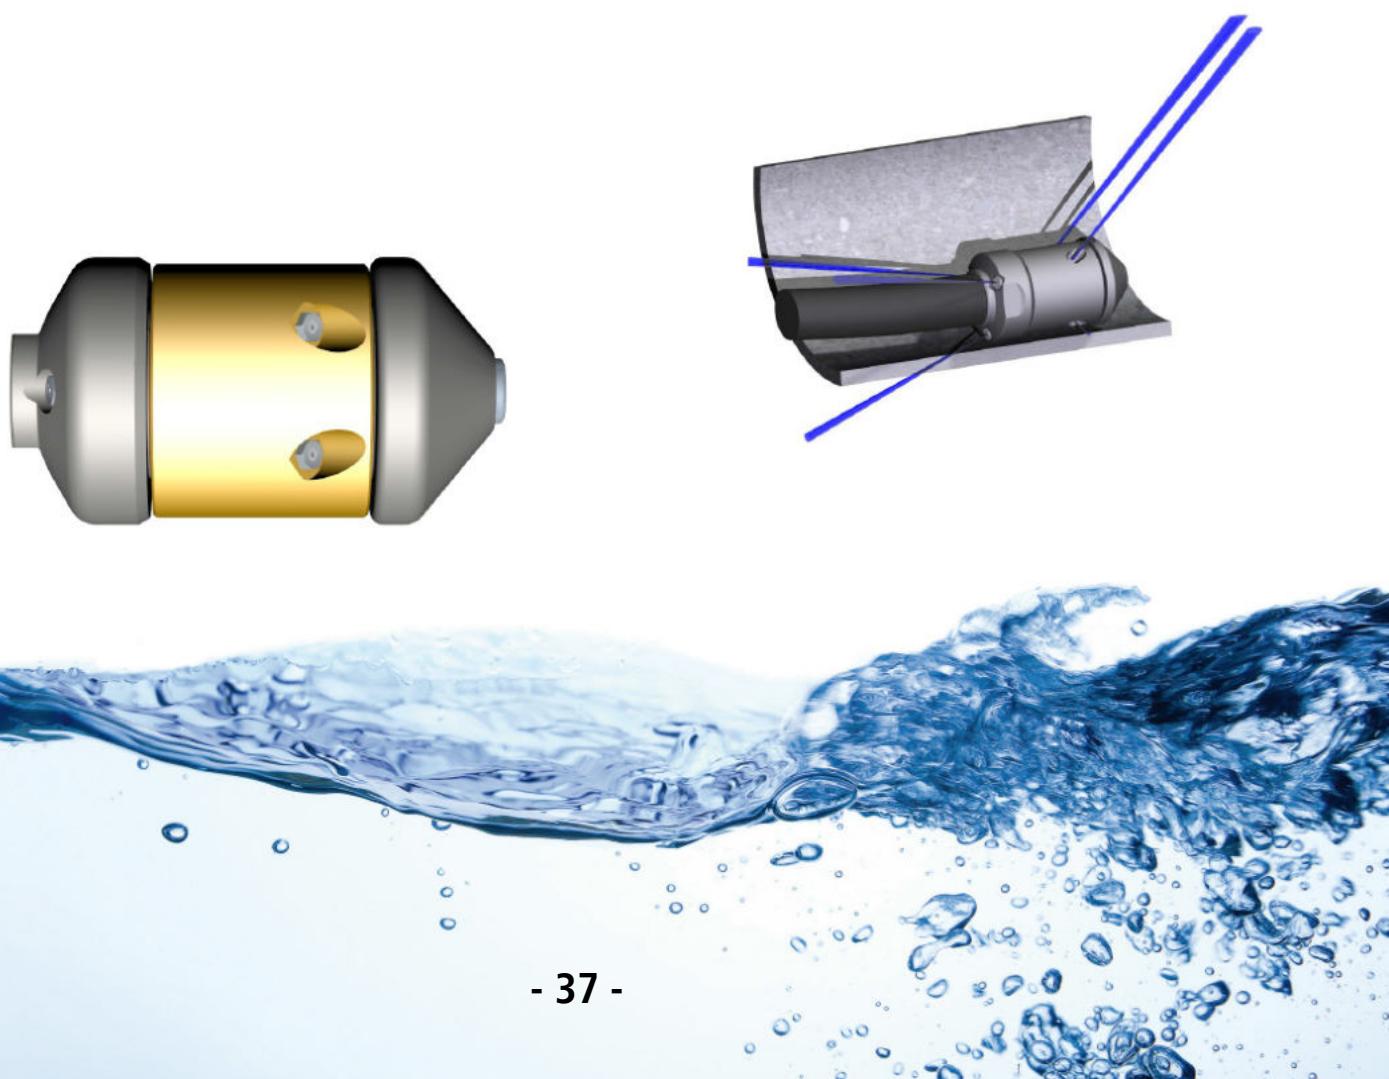

HRV nozzles 1/4" NPT - 1 1/4"


											
03.028N	1/4" NPT	2 - 4	8	4 x M4	3 x M4	*	1.1 x 2.2	0.45	-	5,075	
03.040	1/2"	3 - 6	13	4 x M6	3 x M6	*	1.6 x 3.2	1.24	-	5,075	
03.050A	1/2"	4 - 8	18	4 x M6	3 x M6	*	2.0 x 3.9	2.43	-	5,075	*
03.050B	3/4"	4 - 8	18	4 x M6	3 x M6	*	2.0 x 3.9	2.43	-	3,625	*
03.060	1"	4 - 12	26	4 x M8	3 x M8	*	2.4 x 4.4	3.53	-	3,625	
03.100A	1"	8 - 24	53	4 x M10	3 x M10	*	3.9 x 7.1	16.31	-	3,625	
03.100B	1 1/4"	8 - 24	53	4 x M10	3 x M10	*	3.9 x 7.1	16.31	-	3,625	

KBR nozzles

This all round enz® combination nozzle is excellent for flushing out pipes as well as adjoining lateral pipes at any angle. It only requires a very small pump capacity and uses 2 radial jets at a 90° angle to the pipe wall and 2 semi-radial retro-jets at a 45° angle. This combination allows both, a forward thrust of the nozzle and simultaneously, a flushing away of the waste material.

Applications

- To remove organic deposits
- To clean heat exchangers
- Cleaning of fat deposits

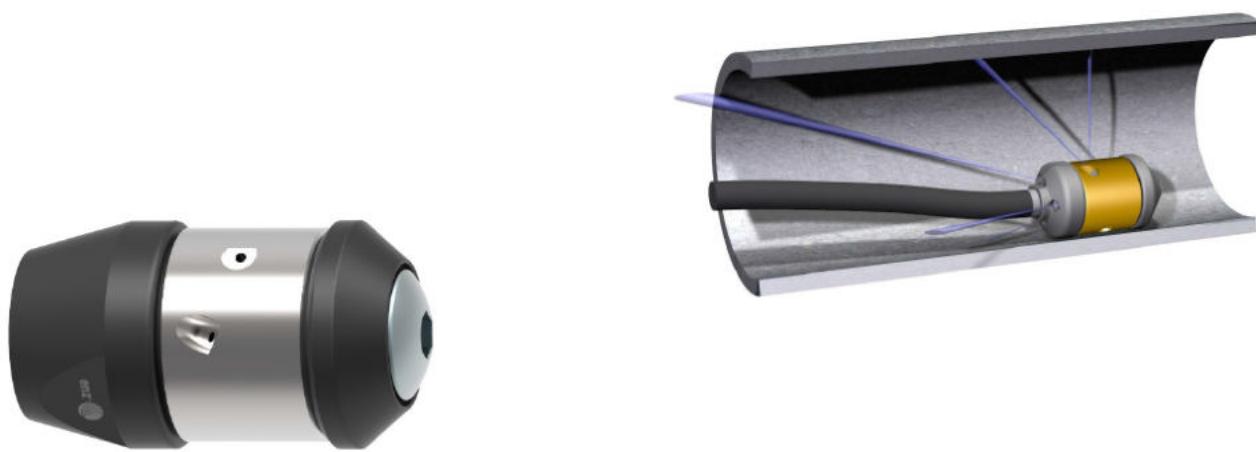

KBR nozzles 1/8" NPT

04.016A07N	1/8" NPT	1 - 2	3	4 x 0.7	-		0.6 x 1.2	0.07		5,075
04.016A08N	1/8" NPT	1 - 2	4	4 x 0.80	-		0.6 x 1.2	0.07		5,075
04.016A09N	1/8" NPT	1 - 2	4.5	4 x 0.90	-		0.6 x 1.2	0.07		5,075
04.016A10N	1/8" NPT	1 - 2	5.5	4 x 1.00	-		0.6 x 1.2	0.07		5,075
04.016A11N	1/8" NPT	1 - 2	7	4 x 1.10	-		0.6 x 1.2	0.07		5,075
04.016AS07N	1/8" NPT	1 - 2	6	4 x 0.70	3 x 0.80	-	0.6 x 1.2	0.05	-	5,075
04.016AS08N	1/8" NPT	1 - 2	6	4 x 0.80	3 x 0.80	-	0.6 x 1.2	0.05	-	5,075

KBR nozzles 1/4" NPT

04.016B04N	1/4" NPT	1 - 2	3	4 x 0.40	-		0.6 x 1.2	0.07		5,075
04.016BV07N	1/4" NPT	0.7 - 2.4	3	90°: 2 x 0.70, 45°: 2 x 0.70	-	*	0.6 x 1.2	0.06	-	5,000
04.016BV08N	1/4" NPT	0.7 - 2.4	3	90°: 2 x 0.80, 45°: 2 x 0.80	-	*	0.6 x 1.2	0.06	-	5,000
04.016BV09N	1/4" NPT	0.7 - 2.4	3	90°: 2 x 0.90, 45°: 2 x 0.90	-	*	0.6 x 1.2	0.06	-	5,000
04.016BV10N	1/4" NPT	0.7 - 2.4	3	90°: 2 x 1.00, 45°: 2 x 1.00	-	*	0.6 x 1.2	0.06	-	5,000
04.016BV11N	1/4" NPT	0.7 - 2.4	3	90°: 2 x 1.10, 45°: 2 x 1.10	-	*	0.6 x 1.2	0.06	-	5,000

KBR nozzles 3/8" NPT

04.028BN	3/8" NPT	1 - 4	3	4 x M4	-	*	1.1 x 2.2	0.44	-	5,075

KBR nozzles 1/2"

								 max	
04.040A	1/2"	3 - 6	5	4 x M6	-	1.6 x 3.2	1.2	5,075	
04.040AS	1/2"	3 - 6	11	4 x M6	3 x M6	1.6 x 3.2	1.2	5,075	
04.050A	1/2"	4 - 8	18	4 x M6	-	2.0 x 3.9	2.4	5,075	*
04.050AS	1/2"	4 - 8	18	4 x M6	3 x M6	2.0 x 3.9	2.4	5,075	*

KBR nozzles 3/4"

								 max	
04.040B	3/4"	3 - 6	5	4 x M6	-	1.6 x 3.2	1.19	3,625	
04.050B	3/4"	4 - 8	18	4 x M6	-	2.0 x 3.9	2.4	3,625	*
04.050BS	3/4"	4 - 8	18	4 x M6	3 x M6	2.0 x 3.9	2.4	3,625	*

KBR nozzles 1" - 1 1/4"


								 max
04.060	1"	4 - 12	21	4 x M8	3 x M8	2.4 x 4.4	3.53	3,625
04.100A	1"	8 - 24	53	4 x M10	3 x M10	3.9 x 6.9	16.09	3,625
04.100B	1 1/4"	8 - 24	53	4 x M10	3 x M10	3.9 x 6.9	16.09	3,625

KBRV nozzles

The nozzle enz® KBRV is provided with 2 semi-radial jets directed forward in an angle of 45°. As a result, this nozzle must either be equipped with extra thrust jets or be mounted on a lance. The forward jets disintegrate most any residue and flush the debris ahead of the nozzle.

Applications

- To remove plastic deposits
- To clean heat exchangers
- Cleaning of fat deposits
- Flushing of the pipes from the house toward the main line

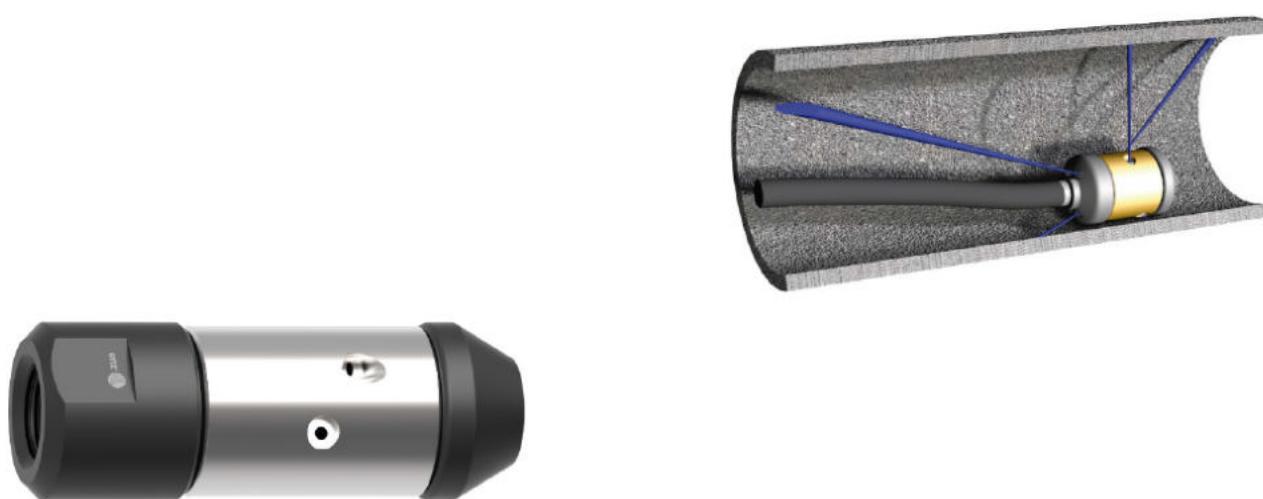

KBRV nozzles 1/8" - 1/4"



										
04.016AV07N	1/8" NPT	0.7 - 2.4	3	90°: 2 x 0.70, 45°: 2 x 0.70	-	*	0.6 x 1.2	0.06	-	5,000
04.016AV08N	1/8" NPT	0.7 - 2.4	3	90°: 2 x 0.80, 45°: 2 x 0.80	-	*	0.6 x 1.2	0.06	-	5,000
04.016AV09N	1/8" NPT	0.7 - 2.4	3	90°: 2 x 0.90, 45°: 2 x 0.90	-	*	0.6 x 1.2	0.06	-	5,000
04.016AV10N	1/8" NPT	0.7 - 2.4	3	90°: 2 x 1.00, 45°: 2 x 1.00	-	*	0.6 x 1.2	0.06	-	5,000
04.016AV11N	1/8" NPT	0.7 - 2.4	3	90°: 2 x 1.10, 45°: 2 x 1.10	-	*	0.6 x 1.2	0.06	-	5,000
04.016AVS04N	1/8" NPT	0.7 - 2.4	5	90°: 2 x 0.40, 45°: 2 x 0.40	3 x 0.80	*	0.6 x 1.2	0.06	-	5,000
04.016AVS07N	1/8" NPT	0.7 - 2.4	6	90°: 2 x 0.70, 45°: 2 x 0.70	3 x 0.80	*	0.6 x 1.2	0.06	-	5,000
04.016AVS08N	1/8" NPT	0.7 - 2.4	6	90°: 2 x 0.80, 45°: 2 x 0.80	3 x 0.80	*	0.6 x 1.2	0.06	-	5,000
04.016BV07N	1/4" NPT	0.7 - 2.4	3	90°: 2 x 0.70, 45°: 2 x 0.70	-	*	0.6 x 1.2	0.06	-	5,000
04.016BV08N	1/4" NPT	0.7 - 2.4	3	90°: 2 x 0.80, 45°: 2 x 0.80	-	*	0.6 x 1.2	0.06	-	5,000
04.016BV09N	1/4" NPT	0.7 - 2.4	3	90°: 2 x 0.90, 45°: 2 x 0.90	-	*	0.6 x 1.2	0.06	-	5,000
04.016BV10N	1/4" NPT	0.7 - 2.4	3	90°: 2 x 1.00, 45°: 2 x 1.00	-	*	0.6 x 1.2	0.06	-	5,000
04.016BV11N	1/4" NPT	0.7 - 2.4	3	90°: 2 x 1.10, 45°: 2 x 1.10	-	*	0.6 x 1.2	0.06	-	5,000
04.016BVS04N	1/4" NPT	0.7 - 2.4	5	90°: 2 x 0.40, 45°: 2 x 0.40	3 x 0.80	*	0.6 x 1.2	0.06	-	5,000
04.016BVS07N	1/4" NPT	0.7 - 2.4	6	90°: 2 x 0.70, 45°: 2 x 0.70	3 x 0.80	*	0.6 x 1.2	0.06	-	5,000

KBRV nozzles



04.016BVS08N	1/4" NPT	0.7 - 2.4	6	90°: 2 x 0.80, 45°: 2 x 0.80	3 x 0.80	*	0.6 x 1.2	0.06	-	5,000	
04.028AVN	1/4" NPT	1.2 - 3.9	5	90°: 2 x M4, 45°: 2 x M4	3 x M4	*	1.1 x 2.2	0.45	-	5,000	

KBRV nozzles 1/2" - 1 1/4"



04.040AV	1/2"	3 - 6	8	90°: 2 x M6, 45°: 2 x M6	3 x M6	*	1.6 x 3.2	1.19	-	5,000	
04.050AV	1/2"	4 - 8	18	90°: 2 x M6, 45°: 2 x M6	3 x M6	*	2.0 x 3.9	2.43	-	5,000	*
04.050BV	3/4"	4 - 8	18	90°: 2 x M6, 45°: 2 x M6	3 x M6	*	2.0 x 3.9	2.43	-	3,600	*
04.060V	1"	4 - 12	26	90°: 2 x M8, 45°: 2 x M8	3 x M8	*	2.4 x 4.4	3.53	-	3,600	
04.100AV	1"	8 - 24	53	90°: 2 x M10, 45°: 2 x M10	3 x M10	*	3.9 x 6.9	16.09	-	3,600	
04.100BV	1 1/4"	8 - 24	53	90°: 2 x M10, 45°: 2 x M10	3 x M10	*	3.9 x 6.9	16.09	-	3,600	

Bulldog®

The enz® Bulldog® rotating nozzle has been designed for operation with recycling water and fresh water. The cleverly built sliding bearing allows the use of every kind of recycled water. An integrated oil-free braking system results in a low wear and tear operation and in controlled numbers of rotation. In this way a most efficient and economic pipe cleaning is achieved. The bore of the nozzle insert determines the admissible size of the dirt particles up to a maximum Ø 0.05 inch.

Transport and water costs are noticeably reduced.

Characteristics

- Easy to handle
- The tool is practically maintenance-free

Applications

- To remove fat, roots and harder incrustations
- For operation with recycling water and fresh water



Bulldog® low flow 1/4" NPT - 1/2"

408.037	1/2"	1.6 - 5	6	50°: 2 x M6	-	1 x M6	1.5 x 3.4	0.97	ok	5000
408.037AN	1/4" NPT	1.6 - 4	6	50°: 2 x M6	-	1 x M6	1.5 x 3.5	1.06	ok	5000
408.037BN	3/8" NPT	1.6 - 4	6	50°: 2 x M6	-	1 x M6	1.5 x 3.5	1.01	ok	5000

Bulldog® 1/2" - 3/4"

400.037	1/2"	1.6 - 5	13	30°: 6 x M6	-	1 x M6	1.5 x 3.4	0.93	ok	2900
400.037S	1/2"	1.6 - 5	24	30°: 6 x M6	3 x M4	1 x M6	1.5 x 3.4	0.93	ok	2900

Bulldog® with skid 1/2" - 3/4"

401.037	1/2"	3 - 8	11	80°: 3 x M6	-	-	2.4 x 4.8	1.59	ok	2900
401.037CS	3/4"	3 - 8	16	80°: 3 x M6	3 x M4	-	2.4 x 4.8	1.72	ok	2900
401.037S	1/2"	3 - 8	16	80°: 3 x M6	3 x M4	-	2.4 x 4.8	1.59	ok	2900
404.037	1/2"	3 - 8	13	30°: 3 x M6, 80°: 3 x M6	-	-	2.4 x 4.8	1.59	ok	2900
404.037CS	3/4"	3 - 8	21	30°: 3 x M6, 80°: 3 x M6	3 x M4	-	2.4 x 4.8	1.72	ok	2900
404.037S	1/2"	3 - 8	21	30°: 3 x M6, 80°: 3 x M6	3 x M4	-	2.4 x 4.8	1.59	ok	2,900
406.037	1/2"	3 - 8	17	30°: 6 x M6	-	2 x M4	2.4 x 4.8	1.59	ok	2900
406.037CS	3/4"	3 - 8	22	30°: 6 x M6	3 x M4	2 x M4	2.4 x 4.8	1.72	ok	2900
406.037S	1/2"	3 - 8	22	30°: 6 x M6	3 x M4	2 x M4	2.4 x 4.8	1.59	ok	2900

Accessory and wearing parts Bulldog® 1/4" - 3/4"


00100.03720		Skid for Bulldog 37	-> 400.037	1/2"	3 - 8	2.4 x 3.1	0.58
00100.037107		Head Bulldog 1/2" 3x2	-> 408.037			1.3 x 0.8	0.13
00100.03720B		Skid for Bulldog 37		3/4"	3 - 8	2.35 x 3.1	0.73
00100.037101		Head Bulldog 1/2"	-> 400.037, 400.037C, 400.037S			1.3 x 0.8	
00100.037104		Head KBR Bulldog 37	-> 401.037, 401.037S, 404.037, 404.037S, 404.037C, 406.037, 406.037S, 406.037C			1.3 x 1.2	0.23

Bulldog® 3/4" - 1"


400.060A	3/4"	4 - 12	26	6 x M8	6 x M8	1 x M8	2.4 x 6.0
400.060B	1"	4 - 12	26	6 x M8	6 x M8	1 x M8	2.4 x 6.0
400.080SET100	1"	8 - 16	53	6 x M10	6 x M8	1 x M10	5.9 x 10.2
400.080SET150	1"	8 - 16	53	6 x M10	6 x M8	1 x M10	5.9 x 10.2
402.080LS100	1"	5 - 16	53	6 x M10	6 x M8	1 x M10	3.9 x 8.7
402.080LS150	1"	7 - 16	53	6 x M10	6 x M8	1 x M10	5.9 x 10.2
404.080HS100	1"	5 - 16	53	6 x M10	6 x M8	1 x M10	3.9 x 8.7
404.080HS150	1"	7 - 16	53	6 x M10	6 x M8	1 x M10	12.72

Accessory and wearing parts Bulldog® 3/4" - 1"



00100.0807		Skid guidance for Bulldog 80 / 60	-> 400.060, 402.080, 404.080	1"	5 - 16	3.9 x 5.3	2.4	
00100.0808		Skid guidance for Bulldog 80/60	-> 402.080, 404.080	1"	7 - 16	5.9 x 7.1	6.3	
00100.08073		Thrust stop with O-Ring and screw	-> 402.080, 404.080				0.09	
00400.0605		Head Bulldog 60	-> 400.060			2.0 x 1.7	0.71	
00402.0805-4		Head HRH Bulldog 80				2.5 x 2.1	1.48	
00404.0805-12		Head KBR Bulldog 80	-> 404.080			2.5 x 2.1	1.52	
100.060300S		Scissors skid with steel wheels		3/4"	12 - 43	12 - 43 x 30	21.2	5,000
100.060300P		Scissors skid with polyurethane wheels		3/4"	12 - 43	12 - 43 x 30	22.2	5,000
100.060300JS		Scissors skid with steel wheels & hand lever		3/4"	12 - 43	12 - 43 x 30	20.4	5,000
100.060300JP		Scissors skid with polyurethane wheels		3/4"	12 - 43	12 - 43 x 30	21.4	5,000
100.060300J		Scissors skid with hand lever		3/4"	12 - 43	12 - 43 x 30	18.8	5,000
100.060300		Scissors skid		3/4"	12 - 32	12 - 43 x 30	19.6	5,000

Bulldog® 1" - 1 1/4"



400.101A	1"	10 - 24	53	35°: 3 x M10, 90°: 2 x M10	6 x M10	1 x M10	5.1 x 10.2	15.87	ok	2,900	
400.101B	1 1/4"	10 - 24	53	35°: 3 x M10, 90°: 2 x M10	6 x M10	1 x M10	5.1 x 10.2	15.87	ok	2,900	

401.101AS	1"	10 - 24	53	80°: 6 x M10	6 x M10	1 x M10	5.1 x 10.2	15.87	ok	2,900
401.101BS	1 1/4"	10 - 24	53	80°: 6 x M10	6 x M10	1 x M10	5.1 x 10.2	15.87	ok	2,900
404.101AS	1"	10 - 24	53	80°: 3 x M10, 45°: 3 x M10	6 x M10	1 x M10	5.1 x 10.2	15.87	ok	2,900
404.101BS	1 1/4"	10 - 24	53	80°: 3 x M10, 45°: 3 x M10	6 x M10	1 x M10	5.1 x 10.2	15.87	ok	2,900

Accessory and wearing parts Bulldog® 1" - 1 1/4"


100.1019A		BULLDOG Skids for 400.100 8"	-> 400.101	1 1/4" m -> 1" f
100.1019B		BULLDOG Skids for 400.100 8"	-> 400.101	1 1/4" m - > 1 1/4" f
00400.1014		Head KBR Bulldog 100	-> 400.101	3.1 x 3.0
00400.1015		Head RGS Bulldog 100	-> 401.101, 404.101	3.0 x 3.0
100.10073		Thrust stop with O-Ring and screw	-> 401.101AS/ BS	
100.1004RA		Cage 16'		1 1/4" m -> 1" f
100.1004RAW		Cage 16'		1 1/4" m -> 1" f
100.1004RB		Cage 16"		1 1/4" m - > 1 1/4" f
100.1004RBW		Cage 16"		1 1/4" m - > 1 1/4" f

Bulldog® Antiblast

Cleaning sewer lines when near home installations brings the risk of pressure equalisation through toilets or stench traps. This comes from negative pressure arising ahead of the nozzle or excess pressure following the nozzle if the installation is not correct or venting is not working properly. It's a very unpleasant surprise when this effect unintentionally turns a toilet into a shower! For this reason, enz® collaborated with a prestigious technical institute to develop and test the Bulldog® Antiblast. The Bulldog® Antiblast prevents this unpleasant side effect and guarantees cleaning in all directions, right down to the pores.

Advantages

- No pressure equalisation through stench traps or toilets
- Excellent streak-free, all-around cleaning
- Low maintenance, and compatible with recycled water
- Proven design
- Very simple to match to pump capacity
- Scientifically examined and tested



Bulldog® Antiblast 1" - 1 1/4"

										
600.080	1"	8 - 16	48	6 x M10	6 x M8	1 x M10	3.9 x 8.1	9.39	ok	1,160
600.100A	1"	10 - 24	53	6 x M10	6 x M10	1 x M10	5.1 x 10.2	16.76	ok	1,160
600.100B	1 1/4"	10 - 24	53	6 x M10	6 x M10	1 x M10	5.1 x 10.2	16.76	ok	1,160

Manhole nozzles

The enz® manhole nozzles are specifically designed for cleaning shafts and vertical pipes. The forward facing water jets provide circumferential cleaning without stripes. The nozzles are self-centering during operation and do not have protruding parts that can cause the nozzle to become wedged on the access ladder. They clean with a front jet on the floor as well and require little space in the cleaning vehicle. Additional advantages include the manhole nozzles having no water loss from leaks and require practically no maintenance. The arduous cleaning with a hand nozzle or a lance is history with the manhole nozzle. Likewise, conical shafts can be cleaned easily.

Advantages

- Circumferential cleaning of vertical pipes such as shafts or fountains
- Thorough cleaning even of very deep shafts



Manhole nozzles 1/2" - 3/4"

403.060A	1/2"	24 - 59	26	6 x M8	-	2 x M6	2.4 x 6.1	4.56	ok	2,900
403.060B	3/4"	24 - 59	26	6 x M8	-	2 x M6	2.4 x 6.1	4.56	ok	2,900

Manhole nozzles 1"

01.100LS	1"	24 - 59	26	4 x M10	-	*	3.9 x 7.0	16.09	-	3,625

Manhole nozzles 1" - 1 1/4"

401.101A	1"	10 - 79	40	6 x M10	-	1 x M10	5.1 x 10.2	15.87	ok	2,900
401.101B	1 1/4"	10 - 79	40	6 x M10	-	1 x M10	5.1 x 10.2	15.87	ok	2,900

Rotopuls vibration nozzles

The enz® rotating nozzle is provided with an eccentrically supported rotor, which produces very fast vibrations and pulsating jets. The resulting pulsations become as strong that deposits up to 4 inch thickness are disintegrated.

Thanks to the application of the rotopuls nozzle, the more expensive work with the cutting tools or with the chain flail head can be avoided in many cases.

Important: Rotopuls nozzles develop strong hydraulic impacts and vibrations. This can possibly cause damage in some sort of pipes (e.g. earthenware pipes, thinwalled plastic pipes or badly-bedded PVC pipes).

Applications

- The Rotopuls nozzles are conceived to remove middle-hard deposits in pipes of plastic, steel or concrete



Rotopuls 16 1/8" NPT - 1/4" NPT

04.016ANE08	1/8" NPT	2 - 4	4	4 x 0.8	-	-	0.8 x 1.1	0.06	-	5,075
04.016ANE10	1/8" NPT	2 - 4	4	4 x 1.0	-	-	0.8 x 1.1	0.06	-	5,075
04.016ANES08	1/8" NPT	2 - 4	7	4 x 0.8	3 x 0.8	-	0.8 x 1.2	0.06	-	5,075
04.016ANES10	1/8" NPT	2 - 4	7	4 x 1.0	3 x 0.8	-	0.8 x 1.2	0.06	-	5,075
04.016BNE08	1/4" NPT	2 - 4	4	4 x 0.8	-	-	0.8 x 1.1	0.06	-	5,075
04.016BNE10	1/4" NPT	2 - 4	4	4 x 1.0	-	-	0.8 x 1.1	0.06	-	5,075
04.016BNES08	1/4" NPT	2 - 4	7	4 x 0.8	3 x 0.8	-	0.8 x 1.2	0.06	-	5,075
04.016BNES10	1/4" NPT	2 - 4	7	4 x 1.0	3 x 1.0	-	0.8 x 1.2	0.06	-	5,075

Rotopuls nozzles 1/4" NPT - 1 1/4"

01.028ANE	1/4" NPT	2 - 4	3	2 x M4	3 x M4	*	1.1 x 2.2	0.42	-	5,075
02.028ANE	1/4" NPT	1 - 4	2	2 x M4	-	-	1.1 x 2.2	0.40	-	5,075
02.028BNE	3/8" NPT	1 - 4	2	2 x M4	-	-	1.1 x 2.4	0.44	-	5,075
04.040AE	1/2"	3 - 6	5	4 x M4	3 x M6	*	1.6 x 3.2	1.16	-	5,075
04.050AE	1/2"	4 - 8	18	4 x M6	3 x M6	*	2.0 x 3.8	2.16	-	5,075
04.050BE	3/4"	4 - 8	18	4 x M6	3 x M6	*	2.0 x 3.8	2.16	-	3,625
04.060EK	1"	4 - 12	26	4 x M6	3 x M8	*	2.4 x 4.4	3.53	-	3,625
04.100BE	1 1/4"	8 - 24	53	4 x M10	3 x M10	*	3.9 x 6.9	15.87	-	3,625

Rotopuls nozzles 3/8" NPT - 1/2"

01.034ANE	3/8" NPT	1.8 - 6	5	2 x M4	3 x M4	*	1.3 x 2.3	0.49	-	5,075
01.034BE	1/2"	1.8 - 6	5	2 x M4	3 x M4	*	1.3 x 2.3	0.49	-	5,075
04.044AE	1/2"	3 - 6	5	4 x M4	3 x M6	*	1.7 x 3.6	1.32	-	5,075
04.044E	3/8"	3 - 6	5	4 x M4	3 x M6	*	1.7 x 3.6	1.32	-	5,075

Turbopuls 1/2" - 3/4"

410.060A	1/2"	4 - 8	16	1 x M6	3 x M8	-	2.5 x 7.1	5.29	ok	2,900
410.060B	3/4"	4 - 8	16	1 x M6	3 x M8	-	2.5 x 7.1	5.29	ok	2,900
410.080A	1/2"	6 - 12	21	1 x M6	3 x M8	-	3.1 x 8.3	9.48	ok	2,900
410.080A-G	1/2"	6 - 12	21	1 x M6	3 x M8	-	3.1 x 8.3	9.48	ok	2,900
410.080B	3/4"	6 - 12	21	1 x M6	3 x M8	-	3.1 x 8.3	9.48	ok	2,900
410.080B-G	3/4"	6 - 12	21	1 x M6	3 x M8	-	3.1 x 8.3	9.48	ok	2,900

Turbopuls 1" - 1 1/4"

410.120A	1"	8 - 39	40	1 x M8	6 x M10	-	4.7 x 12.6	31.97	ok	2,900
410.120A-W	1"	8 - 39	40	1 x M8	6 x M10	-	4.7 x 12.6	31.97	ok	2,900
410.120B	1 1/4"	8 - 39	40	1 x M8	6 x M10	-	4.7 x 12.6	31.97	ok	2,900
410.120B-W	1 1/4"	8 - 39	40	1 x M8	6 x M10	-	4.7 x 12.6	31.97	ok	2,900

Accessory and wearing parts Turbopuls

00410.0805		Impact head							
410.1209		Twinholder for 410.120		1" / 1 1/4"	from 16	2 x 39.63	14.2 x 27.6	15.43	2,900
00410.08051		Impact head soft							
00410.08052		Impact head Ø 100mm							
95.F100M075150		HP Textile-Hose		3/4" m - 1" f			59.1	3.18	
410.0805		Impact head with screws					3.1 x 2.1	2.5	
410.08052		Impact head 3.9" with screws					3.1 x 2.1	2.5	
410.1205		Impact head standard with screws					4.72 x 2.75	5.22	


410.12051		Impact head soft with screws		4.72 x 2.75	5.22	
00410.1205		Impact head standard		4.72 x 2.75	4.63	
00410.12051		Impact head soft for PVC-pipes		4.72 x 2.75	4.63	
004.0444E		Centre spire for ROTOPULS 04.044AE		0.5 x 1.2	0.04	
00410.08010		Pointed center for Turbopuls Ø 80		0.6 x 2.4	0.15	
00410.12010		Pointed center for Turbopuls Ø 120mm		0.8 x 2.8	0.27	

Guiding nozzles rotative

The enz® guiding nozzles rotative were developed specifically for targeted cleaning of pipe inlets. They are used in searching for connections in ground lines and can thus prevent the need for cleaning via a household connection, for example. Entrance into the connection is made using a head nozzle on a flexible hose. The guiding nozzles rotative are available with and without vibration.

Applications

- Removal of hard deposits in PE, steel and concrete pipes, such as trickle lines

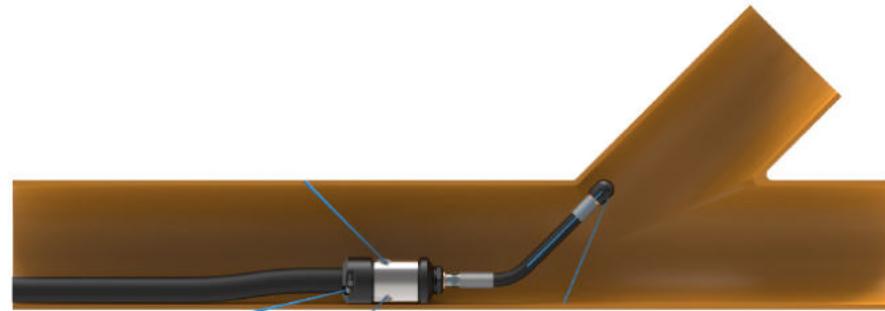

Guiding nozzle rotative 1/2"

										
17.040A-001	1/2"	3 - 6	11	4 x M6	3 x M6	-	1.7 x 10.4	1.46	-	5,075

Vibration guiding nozzle 1/2"

										
17.044AE-001	1/2"	3 - 6	11	4 x M4	3 x M6	-	1.7 x 11.5	1.54	-	5,075

Accessory and wearing parts guiding nozzles rotative

		
95.001	Steering Set to 17.040A/44AE	0.25

Propeller nozzles

With this enz® tool large channels will be efficiently cleaned. They can be used for dimensions of Ø 24 - 120 inch. The skids are easy to adjust and can even be adapted to clean egg-shaped or oval pipe profiles. The propeller nozzles have been designed for the use of recycling-water, of course they can be used for fresh water as well.

Applications

- For cleaning large channels

Propeller nozzles 1" - 1 1/4"

								
07.2500A	1"	24 - 118	66	10 x M10	7 x M10	132	ok	2,900
07.2500B	1 1/4"	24 - 118	66	10 x M10	7 x M10	132	ok	2,900

Accessory and wearing parts propeller nozzles


007.281400

Surface cleaner

Surface cleaner


The rotating enz® nozzle for cleaning surfaces is remarkable for its high efficiency. It outperforms conventional flat jet or round jet nozzles with a large margin.

Turbo Killer

This special nozzle for cleaning surfaces is rotated by the cleaning liquid by means of an impeller. The exhaust axis has an inclination against the central axis of the rotating nozzle, which results in a circular movement.

Applications

- Surface Cleaner: To remove deposits of concrete-slurry, cleaning of store fronts, steps, walls, traffic signboards etc.
- Turbo Killer: for the cleaning of steps, walls, artificial surfaces, traffic signs, etc.

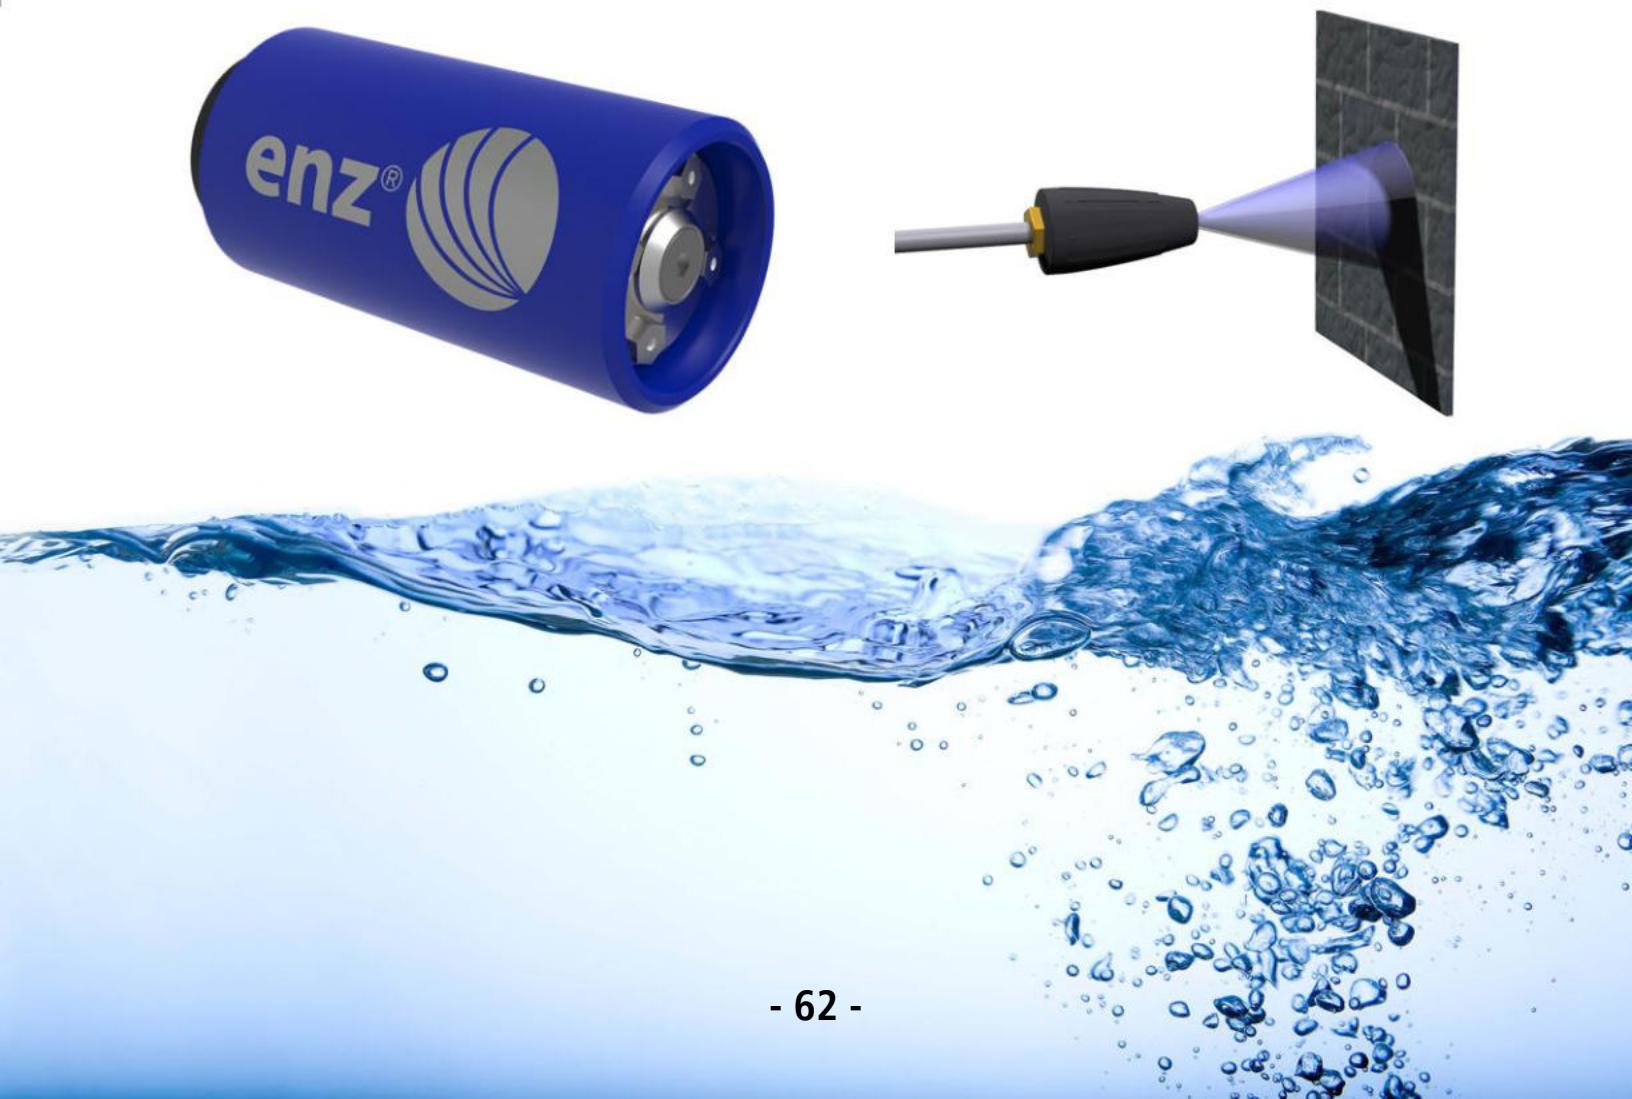

Surface cleaner 3/8"

							 max
18.040-NB-0	3/8" NPT	2.3 / 3.4	2 / 4 x M8	2.0 x 4.2	1.59	-	5,000

Turbo killer 1/4"

							 max
18.020135	1/4"	3	1.35	2.3 x 4.5	1.7	-	5,000
18.020150	1/4"	4	1.50	2.3 x 4.5	1.70	-	5,000
18.020170	1/4"	5	1.70	2.3 x 4.5	1.70	-	5,000
18.020190	1/4"	5	1.90	2.3 x 4.5	1.70	-	5,000

Accessory and wearing parts Turbo killer

	
66.0106.20050 	Rebuild kit for 18.041135
66.0106.20065 	Rebuild kit for 18.041150
66.0106.20080 	Rebuild kit for 18.041170
66.0106.20100 	Rebuild kit for 18.041190

Rotodrill™

Made of wear-resistant, hardened steel, provided with front jet insert and blind plug (interchangeable). Angle of jet backwards, sturdy wall thickness, long service life and a minimum of wear and tear.

Applications

- Appropriate for removal of sludge deposits and coggings



Rotodrill™ 1/4" NPT - 3/8" NPT

36.025NiREV	1/4" NPT	3 - 6	4	1 x 1.50	-	2.7 x 4.1	0.57	-	-	5,000
36.038NiREV	3/8" NPT	3 - 6	4	1 x 1.50	-	2.7 x 4.1	0.57	-	-	5,000

Rotodrill™ 3/8" NPT - 1"

36.038N	3/8" NPT	2 - 6	6.6	6 x M4	1 x 0.90 - 1.80	1.3 x 2.6	.66	-	-	5,000
36.050	1/2"	2 - 6	6.6	6 x M4	1 x 0.90 - 1.80	1.3 x 2.4	.66	-	-	5,000
36.075	3/4"	3 - 8	20	6 x M6	1 x 0.90 - 1.80	1.5 x 3.0	0.75	-	-	5,000
36.100	1"	4 - 10	27	6 x M8	1 x 2.70	2.2 x 3.7	1.91	-	-	3,600

Accessory and wearing parts Rotodrill

66.21040-040		Re-build kit for Rotodrill 36.0xx Ø 1.20 0.06
66.21040-060		Re-build kit for Rotodrill 36.0xx Ø 1.50 0.06
66.21060-200		Re-build kit for Rotodrill 36.100 Ø 2.70 0.11

HydroX

Enz has a very strong range of monojet nozzles. The HydroX nozzle of enz has a very strong performance due to its unique tip. The water jet is very concentrated, resulting in minimal wear. The repair kit is very user friendly, thus allowing a simple repair.



HydroX 3/8" NPT - 1/2"

36.038HE235N	3/8" NPT	7	-	2.35	1.3 x 2.2	.57	-	5,000
36.050HE235	1/2"	7	-	2.35	1.3 x 2.2	.57	-	5,000

Chisel point nozzle without thrust 1/2"

60.050WT	1/2"	1.6	-		1.3 x 2.2	0.32	ok	5,000

Accessory HydroX

66.21040HE-235			Re-build kit for HydroX	Ø 2.35mm	0.06

MJ4


550.04001	3/8" BSPP	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	-	7,500
550.04002	3/8" NPT	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	-	7,500
550.04003	1/2" BSPP	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	-	7,500
550.04004	1/2" NPT	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	-	7,500
550.04005	1/4" BSPP	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	-	7,500
550.04011	9/16" x 18 UNF LH	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	-	7,500
550.04012	M14 x 1.5 LH	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	-	7,500
550.04015	M26 x 1.5	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	-	7,500

Bulldog® UHP

The enz® Bulldog® 14,500 psi rotating nozzle is specially designed for internal pipe cleaning up to 14,500 psi. It is suitable for removing even the most stubborn deposits from the pipe walls. Thanks to its clever bearing system, the Bulldog® is virtually leak-free, resulting in higher efficiency. In addition, the forward-facing cross-jet cuts out the material from the blocked pipe like a milling cutter.

Applications

- Cleaning of heat exchangers in chemical and nuclear plants
- General industrial cleaning
- All in one nozzle: unplugger, polisher, universal

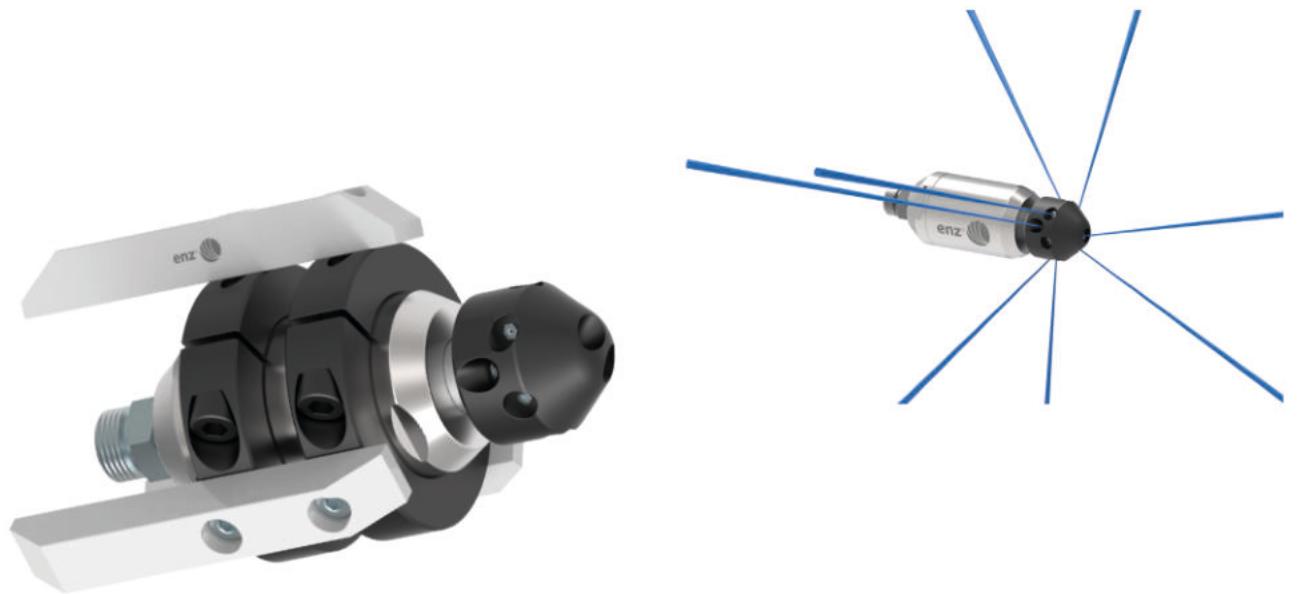

Bulldog® 37 UHP

										
504.037	M24 x 1.5	1.6 - 3.9	6.1	45°: 3 x M6, 75°: 3 x M6		-	1.5 x 5.6	1.10	-	14,500
504.037N	1/2" NPT	1.6 - 3.9	6.1	45°: 3 x M6, 75°: 3 x M6		-	1.5 x 5.6	1.10	-	14,500
506.037	M24 x 1.5	1.6 - 3.9	7.1	45°: 3 x M6, 75°: 3 x M6		2 x M4	1.5 x 5.6	1.10	-	14,500
506.037N	1/2" NPT	1.6 - 3.9	7.1	45°: 3 x M6, 75°: 3 x M6		2 x M4	1.5 x 5.6	1.10	-	14,500

Accessory and wearing parts Bulldog® 37 UHP

				
00500.0375		Head UHP Bulldog 37	1.2 x 1.2	0.26
500.037100		Cage for Bulldog 37UHP	3.0 x 3.5	0.800

Bulldog® 60 UHP

										
501.060	M24 x 1.5	3 - 6	10.6	80°: 6 x M6	-	-	2.4 x 7.3	5.3	-	14,500
501.060N	1/2" NPT	3 - 6	10.6	80°: 6 x M6	-	-	2.4 x 7.3	5.31	-	14,500
504.060	M24 x 1.5	3 - 6	12.2	80°: 3 x M6, 45°: 3 x M6	-	-	2.4 x 7.3	5.31	-	14,500
504.060N	1/2" NPT	3 - 6	12.2	80°: 3 x M6, 45°: 3 x M6	-	-	2.4 x 7.3	5.31	-	14,500
506.060	M24 x 1.5	3 - 6	13.2	80°: 3 x M6, 45°: 3 x M6	-	2 x M6	2.4 x 7.3	5.31	-	14,500
506.060N	1/2" NPT	3 - 6	13.2	80°: 3 x M6, 45°: 3 x M6	-	2 x M6	2.4 x 7.3	5.31	-	14,500

Accessory and wearing parts Bulldog® 60 UHP


00500.0608N		Thrust part	M24 x 1.5, 1/2" NPT		6 x M6	1.5 x 2.5	0.69
500.060100		Cage for Bulldog UHP 2.4"		6 - 12		5.3 x 5.5	1.69
00500.06051		Head universal UHP Bulldog 60				2.0 x 1.7	0.827

UB360


505.060		M24 x 1.5	11.8 - 43.3	10.6	6 / 3 x M8	11.8 x 39.5	35.27	-

Accessory and wearing parts UB360


00500.0605003		Propeller head RGS 3mm UHP Bulldog 60			11			14,500
00500.0605007		Propeller head RGS 7mm UHP Bulldog 60			21.1			14,500
00500.0605012		Propeller head RGS 11.5mm UHP Bulldog 60			37			14,500
500.060300		Scissors skid UHP	M24 x 1.5	12 - 43		12 - 43 x 30	22	15,000

500.060300J		Scissors skid UHP with hand lever	M24 x 1.5	12 - 43		12 - 43 x 30	21.1	15,000
500.060300JP		Scissors skid UHP with polyurethane wheels	M24 x 1.5	12 - 43		12 - 43 x 30	23.8	15,000
500.060300JS		Scissors skid UHP with steel wheels	M24 x 1.5	12 - 43		12 - 43 x 30	22.5	15,000
500.060300P		Scissors skid UHP with polyurethane wheels	M24 x 1.5	12 - 43		12 - 43 x 30	24.7	15,000
500.060300S		Scissors skid UHP with steel wheels	M24 x 1.5	12 - 43		12 - 43 x 30	23.3	15,000
C360		Pulling eye M10						
500.06009050		Set propeller tube UHP 2"		5.5 - 12				15000
500.06009120		Set propeller tube UHP 4.7"		12 - 18				15000
500.06009200		Set propeller tube UHP 7.8"		18 - 26				15000
500.06009300		Set propeller tube UHP 11.8"		26 - 34				15000
500.06009400		Set propeller tube UHP 15.7"		34 - 47				15000

UR nozzles

UR nozzles

enz® UR nozzles are used to clean and in particular to polish the inside of smaller pipes and tubes, e.g. in heat exchangers. The enz® water-brake makes them spin at a constant speed. You can clean the tubes up to 1500 bar (22,000 psi). The 90° and 45° jets clean the hardest of deposits while pulling the nozzle into the tube and flushing the debris out.

UR10

							
05.010-20-M-2	M7	0.5 - 0.6	5.3	45°: 2 x 0.45, 90°: 2 x 0.45	0.4 x 1.0	0.02	22,000
05.010-20-N-1	1/16" NPT	0.5 - 0.6	4.7	45°: 2 x 0.45, 90°: 2 x 0.45	0.4 x 1.0	0.02	14,500
05.010-20-U-2	1/4" UNF	0.5 - 0.6	5.3	45°: 2 x 0.45, 90°: 2 x 0.45	0.4 x 1.0	0.02	22,000
05.010-30-M-2	M7	0.5 - 0.6	7.9	45°: 2 x 0.55, 90°: 2 x 0.50	0.4 x 1.0	0.02	22,000
05.010-30-N-1	1/16" NPT	0.5 - 0.6	6.6	45°: 2 x 0.55, 90°: 2 x 0.50	0.4 x 1.0	0.02	14,500
05.010-30-U-2	1/4" UNF	0.5 - 0.6	7.9	45°: 2 x 0.55, 90°: 2 x 0.50	0.4 x 1.0	0.02	22,000
05.010-40-M-2	M7	0.5 - 0.6	10.6	45°: 2 x 0.65, 90°: 2 x 0.60	0.4 x 1.0	0.02	22,000
05.010-40-N-1	1/16" NPT	0.5 - 0.6	8.7	45°: 2 x 0.65, 90°: 2 x 0.60	0.4 x 1.0	0.02	14,500
05.010-40-U-2	1/4" x UNF	0.5 - 0.6	10.5	45°: 2 x 0.65, 90°: 2 x 0.60	0.4 x 1.0	0.02	22,000

UR 10 Long

							
05.010-20-LM-2	M7	0.5 - 0.6	5.3	45°: 2 x 0.45, 90°: 2 x 0.45	0.4 x 1.3	0.03	22,000
05.010-20-LN-1	1/16" NPT	0.5 - 0.6	4.8	45°: 2 x 0.45, 90°: 2 x 0.45	0.4 x 1.3	0.03	14,500
05.010-20-LU-2	1/4" UNF	0.5 - 0.6	5.3	45°: 2 x 0.45, 90°: 2 x 0.45	0.4 x 1.3	0.03	22,000
05.010-30-LM-2	M7	0.5 - 0.6	7.9	45°: 2 x 0.55, 90°: 2 x 0.50	0.4 x 1.3	0.03	22,000
05.010-30-LN-1	1/16" NPT	0.5 - 0.6	6.6	45°: 2 x 0.55, 90°: 2 x 0.50	0.4 x 1.3	0.03	14,500
05.010-30-LU-2	1/4" UNF	0.5 - 0.6	7.9	45°: 2 x 0.55, 90°: 2 x 0.50	0.4 x 1.3	0.03	22,000
05.010-40-LM-2	M7	0.5 - 0.6	10.6	45°: 2 x 0.65, 90°: 2 x 0.60	0.4 x 1.3	0.03	22,000
05.010-40-LN-1	1/16" NPT	0.5 - 0.6	8.7	45°: 2 x 0.65, 90°: 2 x 0.60	0.4 x 1.3	0.03	14,500

							
05.010-40-LU-2	1/4" UNF	0.5 - 0.6	10.5	45°: 2 x 0.65, 90°: 2 x 0.60	0.4 x 1.3	0.03	22,000

RGS, HRH, KBR, KBRV UHP

The maximum pressure rotating nozzles enz® are most efficient in cleaning the inside wall of pipes with a pressure up to 1000 bar. They are most appropriate to remove harder deposits from the pipe walls and are for tube and pipe cleaning.

Applications

- Cleaning of heat exchangers in chemical and nuclear plants and for general industrial pipe cleaning



RGS nozzles UHP

									max
05.0281N	1/4" NPT	1.2 - 1.6	8	75°: 4 x M4	1.1 x 2.2	0.44	-	-	14,500
05.0401	M24 x 1.5	1.7 - 2.1	11	75°: 4 x M6	1.6 x 4.2	1.54	-	-	14,500
05.0501	M24 x 1.5	2.1 - 3	11	75°: 4 x M6	2.0 x 4.8	2.76	-	-	14,500

HRH nozzles UHP

									max
05.0282N	1/4" NPT	1.2 - 1.6	8	45°: 4 x M4	1.1 x 2.2	0.44	-	-	14,500
05.0402	M24 x 1.5	1.7 - 2.1	11	45°: 4 x M6	1.6 x 4.2	1.54	-	-	14,500
05.0502	M24 x 1.5	2.1 - 3	11	45°: 4 x M6	2.0 x 4.8	2.76	-	-	14,500

KBR nozzles UHP

									max
05.012N	1/8" NPT	0.5 - 0.7	12	45°: 2 x 0.90, 90°: 2 x 0.85	0.5 x 1.2	0.04	-	-	14,500
05.012N05	1/8" NPT	0.5 - 0.7	5.3	45°: 2 x 0.50, 90°: 2 x 0.50	0.5 x 1.2	0.04	-	-	14,500
05.012N07	1/8" NPT	0.5 - 0.7	7.6	45°: 2 x 0.70, 90°: 2 x 0.70	0.5 x 1.2	0.04	-	-	14,500
05.016N	1/8" NPT	0.7 - 1.2	12	45°: 2 x 1.00, 90°: 2 x 0.90	0.6 x 1.6	0.09	-	-	14,500
05.016N05	1/8" NPT	0.7 - 1.2	5.3	45°: 2 x 0.50, 90°: 2 x 0.50	0.6 x 1.6	0.09	-	-	14,500
05.016N07	1/8" NPT	0.7 - 1.2	7.6	45°: 2 x 0.70, 90°: 2 x 0.70	0.6 x 1.6	0.09	-	-	14,500
05.0283N	1/4" NPT	1.2 - 1.6	8	45°: 4 x M4	1.1 x 2.2	0.44	-	-	14,500
05.0284N	1/4" NPT	1.2 - 1.6	8	45°: 2 x M4, 90°: 2 x M4	1.1 x 2.2	0.44	-	-	14,500
05.0404	M24 x 1.5	1.7 - 2.1	11	45°: 2 x M6, 90°: 2 x M6	1.6 x 4.2	1.54	-	-	14,500
05.0504	M24 x 1.5	2.1 - 3	11	45°: 2 x M6, 90°: 2 x M6	2.0 x 4.8	2.77	-	-	14,500

KBRV nozzles UHP

								
05.012NV	1/8" NPT	0.5 - 0.7	12	90°: 2 x 0.85, 45°: 2 x 0.90	0.5 x 1.2	0.04	-	14,500
05.012NV05	1/8" NPT	0.5 - 0.7	5.3	90°: 2 x 0.50, 45°: 2 x 0.50	0.5 x 1.2	0.04	-	14,500
05.012NV07	1/8" NPT	0.5 - 0.7	7.6	90°: 2 x 0.70, 45°: 2 x 0.70	0.5 x 1.2	0.04	-	14,500
05.0285N	1/4" NPT	1 - 2	8	4 x M4	1.1 x 2.2	0.44	-	14,500
05.0405	M24 x 1.5	1.7 - 2.1	11	4 x M6	1.6 x 4.2	1.54	-	14,500
05.0505	M24 x 1.5	2.1 - 3	11	4 x M6	2.0 x 4.8	2.77	-	14,500

URX nozzles

The maximum pressure rotating nozzles enz® are most efficient in cleaning the inside wall of tubes with a pressure up to 36,000 psi. They are most appropriate to remove harder deposits from the tube walls. The rotational speed of the nozzle is controlled by a magnetic brake.

Characteristics

- Speed control
- Low leakage
- Durability

Applications

- Cleaning of heat exchangers in chemical and nuclear plants and for general industrial pipe cleaning



URX19



									
525.019A	9/16" UNF LH	0.9 - 1.3	7	2 x M3	*	0.8 x 3.2	0.31	-	36,000
525.019B	M14 x 1.5 LH	0.9 - 1.3	7	2 x M3	*	0.8 x 3.2	0.31	-	36,000

UC nozzles

The UC nozzles enz® nozzle (with brake jet) are applied for industrial cleaning of heat exchangers and completely clogged pipes. The cross jet, which is directed to the front, cuts the material in the completely clogged pipe like a milling cutter. Simultaneously 2 radial jets of 60° - 90° clean the pipe wall. Through the same effect the removed material is flushed away. The cross jet causes a reaction force which, in many cases, makes it necessary to set the nozzle on a lance. The UC nozzles are available with or without thrust. Through all that, the UC nozzle has become a tool for universal use.

Applications

- For industrial cleaning of heat exchangers and completely clogged pipes



UC09



06.009-18-M-2	M7	0.5 - 0.7	4 / 4.8	90°: 2 x 0.45	-	45°: 2 x 0.45	0.4 x 1.4	0.04	-	14,500 / 22,000	
06.009-18-MS-2	M7	0.5 - 0.7	7.9 / 9.5	90°: 2 x 0.45	3 x 0.60	45°: 2 x 0.45	0.4 x 1.4	0.04	-	14,500 / 22,000	
06.009-18-N-1	1/16" NPT	0.5 - 0.7	4.0	90°: 2 x 0.45	-	45°: 2 x 0.45	0.4 x 1.4	0.04	-	14,500	
06.009-18-NS-1	1/16" NPT	0.5 - 0.7	7.9	90°: 2 x 0.45	3 x 0.60	45°: 2 x 0.45	0.4 x 1.4	0.04	-	14,500	
06.009-18-U-2	1/4" x 28UNF	0.5 - 0.7	4 / 4.8	90°: 2 x 0.45	-	45°: 2 x 0.45	0.4 x 1.4	0.04	-	14,500 / 22,000	
06.009-18-UL-2	1/4" x 28UNF LH	0.5 - 0.7	4.0 / 4.8	90°: 2 x 0.45	-	45°: 2 x 0.45	0.4 x 1.4	0.04	-	14,500 / 22,000	
06.009-18-ULS-2	1/4" x 28UNF LH	0.5 - 0.7	7.9 / 9.5	90°: 2 x 0.45	3 x 0.60	45°: 2 x 0.45	0.4 x 1.4	0.04	-	14,500 / 22,000	
06.009-18-US-2	1/4" x 28UNF	0.5 - 0.7	7.9 / 9.5	90°: 2 x 0.45	3 x 0.60	45°: 2 x 0.45	0.4 x 1.4	0.04	-	14,500 / 22,000	

UC09 with male thread



06.009-18-Ub-2	5/16" x 24 UNF (male)	0.5 - 0.7	4.0 / 4.8	90°: 2 x 0.45	-	45°: 2 x 0.45	0.4 x 1.8	0.04	-	14,500 / 22,000	

UC13



06.013-18-2	1/8" BSPP	0.6 - 0.8	4.2 / 4.8	90°: 2 x 0.50	-	45°: 2 x 0.50	0.5 x 1.9	0.06	-	14,500 / 22,000	
06.013-18-N-1	1/8" NPT	0.6 - 0.8	4.2	90°: 2 x 0.50	-	45°: 2 x 0.50	0.5 x 1.9	0.06	-	14,500	
06.013-18-NS-1	1/8" NPT	0.6 - 0.8	7.4	90°: 2 x 0.50	3 x 0.60	45°: 2 x 0.50	0.5 x 1.9	0.06	-	14,500	
06.013-18-S-2	1/8" BSPP	0.6 - 0.8	7.4 / 9.5	90°: 2 x 0.50	3 x 0.60	45°: 2 x 0.50	0.5 x 1.9	0.06	-	14,500 / 22,000	
06.013-18-UA-2	1/4" x 28UNF	0.6 - 0.8	4.2 / 4.8	90°: 2 x 0.50	-	45°: 2 x 0.50	0.5 x 1.9	0.06	-	14,500 / 22,000	
06.013-18-UAL-2	1/4" x 28UNF LH	0.6 - 0.8	4.2 / 4.8	90°: 2 x 0.50	-	45°: 2 x 0.50	0.5 x 1.9	0.06	-	14,500 / 22,000	
06.013-18-UALS-2	1/4" x 28UNF LH	0.6 - 0.8	7.4 / 9.5	90°: 2 x 0.50	3 x 0.60	45°: 2 x 0.50	0.5 x 1.9	0.06	-	14,500 / 22,000	

06.013-18-UAS-2	1/4" x 28UNF	0.6 - 0.8	7.4 / 9.5	90°: 2 x 0.50	3 x 0.60	45°: 2 x 0.50	0.5 x 1.9	0.06	-	14,500 / 22,000
06.013-18-UB-2	3/8" x 24UNF	0.6 - 0.8	4.2 / 4.8	90°: 2 x 0.50	-	45°: 2 x 0.50	0.5 x 1.9	0.06	-	14,500 / 22,000
06.013-18-UBL-2	3/8" x 24UNF LH	0.6 - 0.8	4.2 / 4.8	90°: 2 x 0.50	-	45°: 2 x 0.50	0.5 x 1.9	0.06	-	14,500 / 22,000
06.013-18-UBLS-2	3/8" x 24UNF LH	0.6 - 0.8	7.4 / 9.5	90°: 2 x 0.50	3 x 0.60	45°: 2 x 0.50	0.4 x 1.9	0.06	-	14,500 / 22,000
06.013-18-UBS-2	3/8" x 24UNF	0.6 - 0.8	7.4 / 9.5	90°: 2 x 0.50	3 x 0.60	45°: 2 x 0.50	0.5 x 1.9	0.06	-	14,500 / 22,000
06.013-30-2	1/8" BSPP	0.6 - 0.8	6.3 / 7.9	90°: 2 x 0.70	-	45°: 2 x 0.70	0.5 x 1.9	0.06	-	14,500 / 22,000
06.013-30-N-1	1/8" NPT	0.6 - 0.8	6.3	90°: 2 x 0.70	-	45°: 2 x 0.70	0.5 x 1.9	0.06	-	14,500
06.013-30-NS-1	1/8" NPT	0.6 - 0.8	11.1	90°: 2 x 0.70	3 x 0.60	45°: 2 x 0.70	0.5 x 1.9	0.06	-	14,500
06.013-30-S-2	1/8" BSPP	0.6 - 0.8	11.1 / 13.7	90°: 2 x 0.70	3 x 0.60	45°: 2 x 0.70	0.5 x 1.9	0.06	-	14,500 / 22,000
06.013-30-UA-2	1/4" x 28UNF	0.6 - 0.8	6.3 / 7.9	90°: 2 x 0.50	-	45°: 2 x 0.50	0.5 x 1.9	0.06	-	14,500 / 22,000
06.013-30-UAL-2	1/4" x 28UNF LH	0.6 - 0.8	6.3 / 7.9	90°: 2 x 0.70	-	45°: 2 x 0.70	0.5 x 1.9	0.06	-	14,500 / 22,000
06.013-30-UALS-2	1/4" x 28UNF LH	0.6 - 0.8	11.1 / 13.7	90°: 2 x 0.70	3 x 0.60	45°: 2 x 0.70	0.5 x 1.9	0.06	-	14,500 / 22,000
06.013-30-UAS-2	1/4" x 28UNF	0.6 - 0.8	11.1 / 13.7	90°: 2 x 0.70	3 x 0.60	45°: 2 x 0.70	0.5 x 1.9	0.06	-	14,500 / 22,000
06.013-30-UB-2	3/8" x 24UNF	0.6 - 0.8	6.3 / 7.9	90°: 2 x 0.70	-	45°: 2 x 0.70	0.5 x 1.9	0.06	-	14,500 / 22,000
06.013-30-UBL-2	3/8" x 24UNF LH	0.6 - 0.8	6.3 / 7.9	90°: 2 x 0.70	-	45°: 2 x 0.70	0.5 x 1.9	0.06	-	14,500 / 22,000
06.013-30-UBLS-2	3/8" x 24UNF LH	0.6 - 0.8	11.1 / 13.7	90°: 2 x 0.70	3 x 0.60	45°: 2 x 0.70	0.5 x 1.0	0.06	-	14,500 / 22,000
06.013-30-UBS-2	3/8" x 24UNF	0.6 - 0.8	11.1 / 13.7	90°: 2 x 0.70	3 x 0.60	45°: 2 x 0.70	0.5 x 1.9	0.06	-	14,500 / 22,000

UC18



06.018-30-A-2	1/8" BSPP	0.9 - 1.0	5.3 / 6.3	90°: 2 x 0.50	-	45°: 2 x 0.50	0.7 x 2.6	0	-	14,500 / 22,000
06.018-30-AS-2	1/8" BSPP	0.9 - 1.0	8.7 / 11.6	90°: 2 x 0.50	3 x M3	45°: 2 x 0.50	0.7 x 2.6	0.17	-	14,500 / 22,000
06.018-30-B-2	1/4" BSPP	0.9 - 1.0	5.3 / 6.3	90°: 2 x 0.50	-	45°: 2 x 0.50	0.7 x 2.6	0.17	-	14,500 / 22,000
06.018-30-BS-2	1/4" BSPP	0.9 - 1.0	8.7 / 11.6	90°: 2 x 0.50	3 x M3	45°: 2 x 0.50	0.7 x 2.6	0.17	-	14,500 / 22,000
06.018-30-NB-1	1/4" NPT	0.9 - 1.0	5.3	90°: 2 x 0.50	-	45°: 2 x 0.50	0.7 x 2.6	0.20	-	14,500

06.018-30-NBS-1	1/4" NPT	0.9 - 1.0	8.7	90°: 2 x 0.50	3 x M3	45°: 2 x 0.50	0.7 x 2.6	0.20	-	-	14,500	
06.018-30-UBL-2	3/8" x 24UNF LH	0.9 - 1.0	5.3 / 6.3	90°: 2 x 0.50	-	45°: 2 x 0.50	0.7 x 2.6	0.17	-	-	14,500 / 22,000	
06.018-30-UBLS-2	3/8" x 24UNF LH	0.9 - 1.0	8.7 / 11.6	90°: 2 x 0.50	3 x M3	45°: 2 x 0.50	0.7 x 2.6	0.17	-	-	14,500 / 22,000	
06.018-30-UC-2	9/16" x 18UNF	0.9 - 1.0	5.3 / 6.3	90°: 2 x 0.50	-	45°: 2 x 0.50	0.7 x 2.6	0.17	-	-	14,500 / 22,000	
06.018-30-UCL-2	9/16" x 18UNF LH	0.9 - 1.0	5.3 / 6.3	90°: 2 x 0.50	-	45°: 2 x 0.50	0.7 x 2.6	0.17	-	-	14,500 / 22,000	
06.018-30-UCLS-2	9/16" x 18UNF LH	0.9 - 1.0	8.7 / 11.6	90°: 2 x 0.50	3 x M3	45°: 2 x 0.50	0.7 x 2.6	0.17	-	-	14,500 / 22,000	
06.018-30-UCS-2	9/16" x 18UNF	0.9 - 1.0	8.7 / 11.6	90°: 2 x 0.50	3 x M3	45°: 2 x 0.50	0.7 x 2.6	0.17	-	-	14,500 / 22,000	
06.018-50-A-2	1/8" BSPP	0.9 - 1.0	9.2 / 10.6	90°: 2 x 0.75	-	45°: 2 x 0.75	0.7 x 2.6	0.17	-	-	14,500 / 22,000	
06.018-50-AS-2	1/8" BSPP	0.9 - 1.0	13.7 / 17.7	90°: 2 x 0.75	3 x M3	45°: 2 x 0.75	0.7 x 2.6	0.17	-	-	14,500 / 22,000	
06.018-50-B-2	1/4" BSPP	0.9 - 1.0	9.2 / 10.6	90°: 2 x 0.75	-	45°: 2 x 0.75	0.7 x 2.6	0.17	-	-	14,500 / 22,000	
06.018-50-BS-2	1/4" BSPP	0.9 - 1.0	13.7 / 17.7	90°: 2 x 0.75	3 x M3	45°: 2 x 0.75	0.7 x 2.6	0.17	-	-	14,500 / 22,000	
06.018-50-NB-1	1/4" NPT	0.9 - 1.0	9.2	90°: 2 x 0.75	-	45°: 2 x 0.75	0.7 x 2.6	0.20	-	-	14,500	
06.018-50-NBS-1	1/4" NPT	0.9 - 1.0	13.7	90°: 2 x 0.75	3 x M3	45°: 2 x 0.75	0.7 x 2.6	0.20	-	-	14,500	
06.018-50-UBL-2	3/8" x 24UNF LH	0.9 - 1.0	9.2 / 10.6	90°: 2 x 0.75	-	45°: 2 x 0.75	0.7 x 2.6	0.17	-	-	14,500 / 22,000	
06.018-50-UBLS-2	3/8" x 24UNF LH	0.9 - 1.0	13.7 / 17.7	90°: 2 x 0.75	3 x M3	45°: 2 x 0.75	0.7 x 2.6	0.17	-	-	14,500 / 22,000	
06.018-50-UC-2	9/16" x 18UNF	0.9 - 1.0	9.2 / 10.6	90°: 2 x 0.75	-	45°: 2 x 0.75	0.7 x 2.6	0.17	-	-	14,500 / 22,000	
06.018-50-UCL-2	9/16" x 18UNF LH	0.9 - 1.0	9.2 / 10.6	90°: 2 x 0.75	-	45°: 2 x 0.75	0.7 x 2.6	0.17	-	-	14,500 / 22,000	
06.018-50-UCLS-2	9/16" x 18UNF LH	0.9 - 1.0	13.7 / 17.7	90°: 2 x 0.75	3 x M3	45°: 2 x 0.75	0.7 x 2.6	0.17	-	-	14,500 / 22,000	
06.018-50-UCS-2	9/16" x 18UNF	0.9 - 1.0	13.7 / 17.7	90°: 2 x 0.75	3 x M3	45°: 2 x 0.75	0.7 x 2.6	0.17	-	-	14,500 / 22,000	
06.018-70-B-2	1/4" BSPP	0.9 - 1.0	12.7 / 14.8	90°: 2 x 0.90	-	45°: 2 x 0.90	0.7 x 2.6	0.17	-	-	14,500 / 22,000	
06.018-70-BS-2	1/4" BSPP	0.9 - 1.0	20.6 / 25.4	90°: 2 x 0.90	3 x M3	45°: 2 x 0.90	0.7 x 2.6	0.17	-	-	14,500 / 22,000	
06.018-70-NB-1	1/4" NPT	0.9 - 1.0	12.7	90°: 2 x 0.90	-	45°: 2 x 0.90	0.7 x 2.6	0.20	-	-	14,500	
06.018-70-NBS-1	1/4" NPT	0.9 - 1.0	20.6	90°: 2 x 0.90	3 x M3	45°: 2 x 0.90	0.7 x 2.6	0.20	-	-	14,500	
06.018-70-UBL-2	3/8" x 24UNF LH	0.9 - 1.0	12.7 / 14.8	90°: 2 x 0.90	-	45°: 2 x 0.90	0.7 x 2.6	0.17	-	-	14,500 / 22,000	
06.018-70-UBLS-2	3/8" x 24UNF LH	0.9 - 1.0	20.6 / 25.4	90°: 2 x 0.90	3 x M3	45°: 2 x 0.90	0.7 x 2.6	0.17	-	-	14,500 / 22,000	
06.018-70-UC-2	9/16" x 18UNF	0.9 - 1.0	12.7 / 14.8	90°: 2 x 0.90	-	45°: 2 x 0.90	0.7 x 2.6	0.17	-	-	14,500 / 22,000	

06.018-70-UCL-2	9/16" x 18UNF LH	0.9 - 1.0	12.7 / 14.8	90°: 2 x 0.90	-	45°: 2 x 0.90	0.7 x 2.6	0.17	-	14,500 / 22,000	
06.018-70-UCLS-2	9/16" x 18UNF LH	0.9 - 1.0	20.6 / 25.4	90°: 2 x 0.90	3 x M3	45°: 2 x 0.90	0.7 x 2.6	0.17	-	14,500 / 22,000	
06.018-70-UCS-2	9/16" x 18UNF	0.9 - 1.0	20.6 / 25.4	90°: 2 x 0.90	3 x M3	45°: 2 x 0.90	0.7 x 2.6	0.17	-	14,500 / 22,000	

UC22

06.022-A-2	1/4" BSPP	1.0 - 1.1	6.6 / 7.9	90°: 2 x M4	-	45°: 2 x M4	0.9 x 2.8	0.29	-	14,500 / 22,000	
06.022-AS-2	1/4" BSPP	1.0 - 1.1	10.6 / 13.2	90°: 2 x M4	3 x M4	45°: 2 x M4	0.9 x 2.8	0.29	-	14,500 / 22,000	
06.022-NA-1	1/4" NPT	1.0 - 1.1	6.6	90°: 2 x M4	-	45°: 2 x M4	0.9 x 2.8	0.29	-	14,500	
06.022-NAS-1	1/4" NPT	1.0 - 1.1	10.6	90°: 2 x M4	3 x M4	45°: 2 x M4	0.9 x 2.8	0.29	-	14,500	
06.022-NB-1	3/8" NPT	1.0 - 1.1	6.6	90°: 2 x M4	-	45°: 2 x M4	0.9 x 2.8	0.29	-	14,500	
06.022-NBS-1	3/8" NPT	1.0 - 1.1	10.6	90°: 2 x M4	3 x M4	45°: 2 x M4	0.9 x 2.8	0.29	-	14,500	
06.022-UB-2	9/16" x 18UNF	1.0 - 1.1	6.6 / 7.9	90°: 2 x M4	-	45°: 2 x M4	0.9 x 2.8	0.29	-	14,500 / 22,000	
06.022-UBL-2	9/16" x 18UNF LH	1.0 - 1.1	6.6 / 7.9	90°: 2 x M4	-	45°: 2 x M4	0.9 x 2.8	0.29	-	14,500 / 22,000	
06.022-UBLS-2	9/16" x 18UNF LH	1.0 - 1.1	10.6 / 13.2	90°: 2 x M4	3 x M4	45°: 2 x M4	0.9 x 2.8	0.29	-	14,500 / 22,000	
06.022-UBS-2	9/16" x 18UNF	1.0 - 1.1	10.6 / 13.2	90°: 2 x M4	3 x M4	45°: 2 x M4	0.9 x 2.8	0.29	-	14,500 / 22,000	

UC28

06.028-A-2	1/4" BSPP	1.2 - 1.6	6.6 / 7.9	90°: 2 x M4	-	45°: 2 x M4	1.1 x 3.3	0.46	-	14,500 / 22,000	
06.028-AS-2	1/4" BSPP	1.2 - 1.6	10.6 / 13.2	90°: 2 x M4	3 x M4	45°: 2 x M4	1.1 x 3.3	0.46	-	14,500 / 22,000	
06.028-B-2	3/8" BSPP	1.2 - 1.6	6.6 / 7.9	90°: 2 x M4	-	45°: 2 x M4	1.1 x 3.3	0.46	-	14,500 / 22,000	
06.028-BS-2	3/8" BSPP	1.2 - 1.6	10.6 / 13.2	90°: 2 x M4	3 x M4	45°: 2 x M4	1.1 x 3.3	0.46	-	14,500 / 22,000	
06.028-NB-1	3/8" NPT	1.2 - 1.6	6.6	90°: 2 x M4	-	45°: 2 x M4	1.1 x 3.3	0.46	-	14,500	
06.028-NBS-1	3/8" NPT	1.2 - 1.6	10.6	90°: 2 x M4	3 x M4	45°: 2 x M4	1.1 x 3.3	0.46	-	14,500	
06.028-UB-2	9/16" x 18UNF	1.2 - 1.6	6.6 / 7.9	90°: 2 x M4	-	45°: 2 x M4	1.1 x 3.3	0.46	-	14,500 / 22,000	

06.028-UBL-2	9/16" x 18UNF LH	1.2 - 1.6	6.6 / 7.9	90°: 2 x M4	-	45°: 2 x M4	1.1 x 3.3	0.46	-	14,500 / 22,000	
06.028-UBLS-2	9/16" x 18UNF LH	1.2 - 1.6	10.6 / 13.2	90°: 2 x M4	3 x M4	45°: 2 x M4	1.1 x 3.3	0.46	-	14,500 / 22,000	
06.028-UBS-2	9/16" x 18UNF	1.2 - 1.6	10.6 / 13.2	90°: 2 x M4	3 x M4	45°: 2 x M4	1.1 x 3.3	0.46	-	14,500 / 22,000	

Surface cleaner UHP

The rotating enz® nozzle for cleaning surfaces is remarkable for its high efficiency. It outperforms conventional flat jet or round jet nozzles with a large margin.

Applications

- To remove deposits of concrete-slurry, cleaning of store fronts, steps, walls, traffic signboards etc.

Additional info

- Other thread types are available on request.
- The MJ4ST can accommodate water temperatures of up to 150° C/ 300° F.



Surface cleaner UHP



18.040-B-2	3/8" BSPP	5.5 / 6.9	2 / 4 x M8	2.0 x 4.2	1.59	-	22,000
18.040-MB-2	M26 x 1.5	5.5 / 6.9	2 / 4 x M8	2.0 x 4.2	1.59	-	22,000
18.040-NB-1	3/8" NPT	4.2 / 5.3	2 / 4 x M8	2.0 x 4.2	1.59	-	14,500
18.040-UBL-2	9/16" UNF LH	5.5 / 6.9	2 / 4 x M8	2.0 x 4.2	1.59	-	22,000

MJ6



550.06001	3/8" BSPP	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	7,500
550.06002	3/8" NPT	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	7,500
550.06003	1/2" BSPP	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	7,500
550.06004	1/2" NPT	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	7,500
550.06005	1/4" BSPP	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	7,500
550.06011	9/16" x 18 UNF LH	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	7,500
550.06012	M24 x 1.5 LH	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	7,500
550.06015	M26 x 1.5	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	7,500

MJ4



550.04001	3/8" BSPP	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	7,500
550.04002	3/8" NPT	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	7,500
550.04003	1/2" BSPP	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	7,500
550.04004	1/2" NPT	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	7,500
550.04005	1/4" BSPP	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	7,500
550.04011	9/16" x 18 UNF LH	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	7,500
550.04012	M14 x 1.5 LH	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	7,500
550.04015	M26 x 1.5	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	7,500

MJ4ST

550.04001ST	3/8" BSPP	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	7,500
550.04002ST	3/8" NPT	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	7,500
550.04003ST	1/2" BSPP	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	7,500
550.04004ST	1/2" NPT	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	7,500
550.04005ST	1/4" BSPP	1.45	0.6 - 2.8	1.7 x 4.3	1.10	-	7,500

MJ3

550.03001	3/8" BSPP	1.72	0.6 - 2.8	1.7 x 4.3	1.46	-	11,500
550.03002	3/8" NPT	1.72	0.6 - 2.8	1.7 x 4.3	1.46	-	11,500
550.03003	1/2" BSPP	1.72	0.6 - 2.8	1.7 x 4.3	1.46	-	11,500
550.03004	1/2" NPT	1.72	0.6 - 2.8	1.7 x 4.3	1.46	-	11,500
550.03005	1/4" BSPP	1.72	0.6 - 2.8	1.7 x 4.3	1.46	-	11,500
550.03011	9/16" x 18 UNF LH	1.72	0.6 - 2.8	1.7 x 4.3	1.46	-	11,500
550.03012	M14 x 1.5 LH	1.72	0.6 - 2.8	1.7 x 4.3	1.46	-	11,500
550.03013	M24 x 1.5 RH	1.72	0.6 - 2.8	1.7 x 4.3	1.46	-	11,500
550.03017	M26 x 1.5	1.72	0.6 - 2.8	1.7 x 4.3	1.46	-	11,500

MJ2

550.02001	9/16" x 18 UNF LH	1.98	0.6 - 2.8	1.9 x 5.2	2.76	-	15,000
550.02002	M14 x 1.5 LH	1.98	0.6 - 2.8	1.9 x 5.2	2.76	-	15,000
550.02007	3/8" BSPP	1.98	0.6 - 2.8	1.9 x 5.2	2.76	-	15,000
550.02008	3/8" NPT	1.98	0.6 - 2.8	1.9 x 5.2	2.76	-	15,000
550.02009	1/2" BSPP	1.98	0.6 - 2.8	1.9 x 5.2	2.76	-	15,000
550.02010	1/2" NPT	1.98	0.6 - 2.8	1.9 x 5.2	2.76	-	15,000
550.02011	1/4" BSPP	1.98	0.6 - 2.8	1.9 x 5.2	2.76	-	15,000

MJ1

550.01001	9/16" x 18 UNF LH	2.38	0.6 - 2.8	1.9 x 5.2	2.76	-	22,000
550.01002	M14 x 1.5 LH	2.38	0.6 - 2.8	1.9 x 5.2	2.76	-	22,000
550.01003	M24 x 1.5 LH	2.38	0.6 - 2.8	1.9 x 5.2	2.76	-	22,000
550.01007	M26 x 1.5	2.38	0.6 - 2.8	1.9 x 5.2	2.76	-	22,000

MJ25

550.25001	9/16" - 18 UNF LH	3.04	0.6 - 2.8	1.9 x 5.2	2.86	-	36,000
550.25002	M14 x 1.5 LH	3.04	0.6 - 2.8	1.9 x 5.2	2.86	-	36,000
550.25005	M26 x 1.5	3.04	0.6 - 2.8	1.9 x 5.2	2.86	-	36,000

Accessory and wearing parts MJ nozzles

550.99006		Repair Kit for MJ 1, MJ2, MJ 3 & MJ 25
550.99007		Repair Kit for MJ 4 & MJ 6
550.99007ST		Repair Kit for MJ 4 ST

Wire rope and chain scrapers

The Chain scraper enz® is an apparatus which has many uses and is simple in handling and maintenance. Several different pipe diameters can be cleaned with the same tool. Layers of mineral deposits and concrete residues are efficiently removed.

Applications

- As preliminary operation before renovation with inliners, coatings or by injections
- Complete root removal
- Removal of incrustations and deposits
- Removal of concrete residues in newly installed sewage pipelines prior to inspection

Chain scraper 10.028 1/4" NPT

10.028N	1/4" NPT	2 - 4	5	3 x M4	3 x M4	1.6 / 1.1 x 3.1	0.71	-	5,000

Chain scrapers 10.060TR 3/8" NPT - 3/4" NPT

10.060ATR-US	3/8" NPT	2 - 8	8	2 x M6	4 x M6	1.6 x 4.4	2.10	ok	5,000
10.060BTR-US	1/2" NPT	2 - 8	8	2 x M6	4 x M6	1.6 x 4.4	2.10	ok	5,000
10.060CTR-US	3/4" NPT	2 - 8	8	2 x M6	4 x M6	1.6 x 5.3	2.35	ok	3,600

Chain scrapers 10.061A/B 1/2" - 3/4"

10.061A	1/2"	3 - 6	16	3 x M6	3 x M6	2.4 x 5.3	3.09	-	3,600
10.061B	3/4"	3 - 6	16	3 x M6	3 x M6	2.4 x 5.3	3.09	-	3,600

Chain scrapers 10.125TR 1"

10.125TR-100	1"	4	13	2 x M6	4 x M8	2.4 x 6	5.51	ok	3,625
10.125TR-125	1"	5	13	2 x M6	4 x M8	2.4 x 6	5.51	ok	3,625
10.125TR-150	1"	6	13	2 x M6	4 x M8	2.4 x 6	5.51	ok	3,625
10.125TR-150-US	1" NPT	6	13	2 x M6	4 x M8	2.4 x 6	5.56	ok	3,600

10.125TR-200	1"	8	13	2 x M6	4 x M8	2.4 x 6	5.51	ok	3,625
10.125TR-200-US	1" NPT	8	13	2 x M6	4 x M8	2.4 x 6	5.56	ok	3,600
10.125TR-225	1"	9	13	2 x M6	4 x M8	2.4 x 6	5.51	ok	3,625
10.125TR-250	1"	10	13	2 x M6	4 x M8	2.4 x 6	5.51	ok	3,625
10.125TR-250-US	1" NPT	4 - 10	13	2 x M6	4 x M8	2.4 x 6	5.56	ok	3,600
10.125TR-300	1"	12	40	2 x M6	4 x M8	2.4 x 6	5.51	ok	3,625

Chain scrapers 10.150RL 1"

10.150RL	1"	6 - 10	26	3 x M8	3 x M10	5.3 - 9.3 x 19.7	28.88	ok	2,900

Wire rope and chain scrapers sets

10.060ATR-SET-US		chain flail 2.36 - 6"	3/8"	3.8
10.060BTR-SET-CH		chain flail 2.36 - 6"	1/2"	6.83
10.060BTR-SET-US		chain flail 2.36 - 6"	1/2"	3.8
10.060CTR-SET-CH		chain flail 2.36 - 6"	3/4"	6.83
10.060CTR-SET-US		chain flail 2.36 - 6"	3/4"	3.8
10.125TR-SET-US		TurboJet rotating chain scraper 2.4"	1" NPT	14.5

Wire rope and chain scrapers 10.200R/RS & 10.300R 1"

									
10.200R	1"	7.8 - 16	53	3 x M10	3 x M10	7.3 - 15.2 x 22.1	77.16	ok	2,900
10.300R	1"	7.8 - 19.7	53	3 x M10	3 x M10	7.3 - 19.2 x 22.1	108	ok	2,900

Wire rope and chain scrapers 10.400R/RS 1"

									
10.400R	1"	16 - 32	79	3 x M10	3 x M10	15.2 - 30.9 x 24.6	103.62	ok	2,900
10.400RS	1"	16 - 32	79	3 x M10	3 x M10	15.2 - 30.9 x 24.6	104.44	ok	2'900

Chain scrapers 10.800R 1 1/4"

									
10.800R	1 1/4"	32 - 47	106	3 x M10	6 x M10	22.1 / 30.4 x 64.6	407.86	ok	2,900

Accessories 10.125TR

0010.125225E		0.26
--------------	---	------



Accessory 10.028

10.028

Pipe diameter	Ø 2 "	Ø 3 "	Ø 4 "	Ø per yard
	Set Pin bolt chain	0010.028050G	0010.028075G	0010.028G
	Set link chains	0010.028050K	0010.028075K	0010.028K
	Cover with cutter	0010.0285M	0010.0285M	0010.0285M
	Plastic guide	0010.0286	0010.0286	0010.0286



Accessories 10.060

10.060ATR

Pipe diameter	Ø 2 "	Ø 3 "	Ø 4 "	Ø 5 "	Ø 6 "	Ø 8 "	per yard
	Set Pin bolt chain with plates	0010.060060G	0010.060075G	0010.060100G	0010.060150G	0010.060200G	11.G
	Set link chains	0010.040060K	0010.040075K	0010.040100K	0010.040125K	0010.040150K	0010.040200K
	Cover with cutter and screws	0010.0605TRM	0010.0605TRM	0010.0605TRM	0010.0605TRM	0010.0605TRM	0010.040K

Wire rope and chain scrapers



Pipe diameter	Ø 2 "	Ø 3 "	Ø 4 "	Ø 5 "	Ø 6 "	Ø 8 "	per yard
	Cage for TurboJet 60	0010.0607TR	0010.0607TR	0010.0607TR	0010.0607TR	0010.0607TR	
	Plastic guide	0010.0407	0010.0407				
	Skid			0010.060710TR	0010.060712TR	0010.060715TR	0010.060720TR



Accessoires 10.061A/B

10.061A

Pipe diameter	Ø 3 "	Ø 4 "	Ø 6 "	Ø 8 "	per yard
	Set chains 0.18" - 7 links	11.07	11.09	11.11	11.13
	Cover with cutter and screws	0010.0605TRM	0010.0605TRM	0010.0605TRM	0010.0605TRM



Accessories 10.125TR

10.125TR

Pipe diameter	Ø 4 "	Ø 5 "	Ø 6 "	Ø 8 "	Ø 9 "	Ø 10 "	Ø 12 "	per yard	
	Set Pin bolt chain with plates	0010.125100G	0010.125125G	0010.125150G	0010.125200G	0010.125225G	0010.125250G	0010.125300G	0010.125G
	Set link chains	0010.125100K	0010.125125K	0010.125150K	0010.125200K	0010.125225K	0010.125250K	0010.125300K	11
	Set wire brushes			0010.125150SE	0010.125200SE		0010.125250SE		
	Cover with cutter	0010.1254TR							
	Cage for 10.125TR		0010.1257TR	0010.1257TR	0010.1257TR	0010.1257TR	0010.1257TR	0010.1257TR	
	Skid for	0010.125710TR	0010.125712TR	0010.125715TR	0010.125720TR	0010.125722TR	0010.125725TR	0010.125730TR	



Accessories 10.150RL

10.150RL

Pipe diameter	Ø 6 "	Ø 8 "	Ø 10 "	per yard	
	Set Pin bolt chain	0010.150150G	0010.150200G	0010.150250G	0010.150G
	Set chains	0010.150150K	0010.150200K	0010.150250K	11.B
	Set Chain plates	0010.1508R	0010.1508R	0010.1508R	
	Skids Chain Flail 150 - 250	0010.1502R	0010.1502R	0010.1502R	
	Diamond crown	0010.150D	0010.200D	0010.250D	



Accessories 10.200R/RS & 10.300R

10.200R

	Pipe diameter	Ø 8 "	Ø 10 "	Ø 12 "	Ø 14 "	Ø 16 "	Ø 20 "	per yard
	Set Pin bolt chain with plate	12.200G	12.250G	12.300G	12.350G	12.401G	12.600G	12.G
	Set chains	12.03 0010.2006	12.07 0010.2006	12.09 0010.2006	12.11 0010.2006	12.13 0010.2006	12.17 0010.2006	12
	Set Chain plates	0010.2008R	0010.2008R	0010.2008R	0010.2008R	0010.2008R	0010.2008R	
	Cutter head (all Ø)	10.20043R	10.20043R	10.20043R	10.20043R	10.20043R	10.20043R	
	Universal tooth (all Ø)	15.ZU	15.ZU	15.ZU	15.ZU	15.ZU	15.ZU	
	Center tooth for center cap 15.ZS (all Ø)		15.ZS	15.ZS	15.ZS	15.ZS	15.ZS	
	Center head with 4 sets of link chain	0010.2004R	0010.2004R	0010.2004R	0010.2004R	0010.2004R	0010.2004R	
	Wire rope head adaption kit	0010.2005	0010.2005	0010.2005	0010.2005	0010.2005	0010.2005	
	Set of wire rope loop	12.200S	12.250S	12.300S	12.350S	12.400S		
	Set of wire rope brush	12.200SE	12.250SE	12.300SE	12.350SE	12.400SE		

Wire rope and chain scrapers



Pipe diameter	Ø 8 "	Ø 10 "	Ø 12 "	Ø 14 "	Ø 16 "	Ø 20 "	per yard
	Diamond crown	0010.200D	0010.250D	0010.300D	0010.350D	0010.400D	
	Skid Front Chain Scraper	0010.20071R	0010.20071R	0010.20071R	0010.20071R	0010.20071R	
	Skid back Chain Scraper	0010.20072R	0010.20072R	0010.20072R	0010.20072R	0010.20072R	
	Cover with cutter	0010.1254TR	0010.1254TR	0010.1254TR	0010.1254TR	0010.1254TR	0010.1254TR
	Root knife chain flail 10.200RS	0010.2509	0010.2509	0010.2509	0010.2509	0010.2509	
	Center head with 4 sets of link chain	0010.2004R1	0010.2004R1	0010.2004R1	0010.2004R1	0010.2004R1	
	Skid adapter 19.7"			10.2005R	10.2005R	10.2005R	10.2005R
	Head 300R	0010.2005R	0010.2005R	0010.2005R	0010.2005R	0010.2005R	0010.2005R
	Head 200RS	0010.2006R	0010.2006R	0010.2006R	0010.2006R	0010.2006R	



Accessories 10.400R/RS

10.400R

Pipe diameter	Ø 16 "	Ø 18 "	Ø 20 "	Ø 22 "	Ø 24 "	Ø 26 "	Ø 28 "	Ø 30 "	Ø 32 "	per yard
	Set Pin bolt chain with plate	12.402G	12.450G	12.500G	12.600G	12.600G	12.700G	12.700G	12.800G	12.800G

Wire rope and chain scrapers



	Pipe diameter	Ø 16 "	Ø 18 "	Ø 20 "	Ø 22 "	Ø 24 "	Ø 26 "	Ø 28 "	Ø 30 "	Ø 32 "	per yard
	Chain for center head of 10.400R	12.400ZG									
	Set chains	12.07 0010.2006	12.09 0010.2006	12.11 0010.2006	12.13 0010.2006	12.15 0010.2006	12.17 0010.2006	12.19 0010.2006	12.23 0010.2006	12.23 0010.2006	12
	Cutter head (all Ø)	10.20043R									
	Universal tooth (all Ø)	15.ZU									
	Center tooth for center cap (all Ø)	15.ZS									
	Center head (all Ø)	0010.4004R									
	Wire rope head	0010.400S	0010.400S	0010.400S	0010.400S	0010.400S					
	Wire rope loop (1 set)	12.250S	12.300S	12.350S	12.400S	12.600S		12.700S			
	Set of wire rope brush 9.8"	12.250SE	12.300SE	12.350SE	12.400SE						
	Egg Skid's complete 400 - 800 mm	10.4008R									
	Root knife chain flail	0010.3804	0010.3804	0010.3804	0010.3804	0010.3804	0010.3804	0010.3804	0010.3804	0010.3804	
	Cover with cutter	0010.1254TR									


Cutters without impacts

These enz® rotating cutters work without impacts. The cutter heads are equipped with hard metal plates, which are able to remove the most any kind of deposits.

Their field of application is versatile. Layers of mineral deposits, concrete or concrete sludges can be milled out with them as well as roots and wood.

Applications

- Concrete or concrete sludges
- Layers of mineral deposits
- Roots, wood

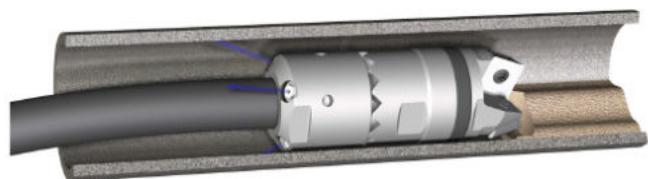

Cutters without impacts 1/4"

									
13.028N	1/4" NPT	1.2	5	3 x M4	3 x M4	1.1 x 3.2	0.6	-	5,000

Cutters without impacts 1/2" - 1"

										
13.040TR	1/2"	1.7 - 2.4	8	2 x M6	4 x M6	-	1.6 x 4.3	1.65	ok	3,600
13.060TR	1"	2.4 - 3.1	13	2 x M6	4 x M8	-	2.4 x 5.1	4.40	ok	3,600

Accessory and wearing parts cutters without impacts

			
16.16Z		Carbide Insert with Screw -> 13.040TR	0.06
0013.0605TR		Milling Cutter Head 2.4"	2 - 3
0013.0405TR		Milling Cutter Head for 1.6"	2 - 2
C20			0.66
FS1010			
FS242			
16.19Z		Carbide Insert with Screw -> 13.060TR	0.06
0013.0407TR-48		Wear ring for Milling Cutter 40 mm -> 13.040TR	0.23
0013.0404TR-48		Wear resistant ring for Milling Cutter 40 mm -> 13.040TR	0.15

0013.0607TR-68		Wear ring for Milling Cutter 60mm	-> 13.060TR	0.28
0013.0604TR-68		Wear resistant ring	-> 13.060TR	0.28
0013.0606TR		exchangeble centre for	-> 13.060TR	0.022

Cutting ball

The enz® cutting ball works without impact, but has the ability to switch in vibration. The cutting ball is equipped with a hard metal front cut for pipes that are more than 50% clogged. The side blades are self-sharpening and maintain their sharpness over their entire service life.

The cutting ball's area of application is diverse. Due to its spherical shape it goes easily around curves without damaging the pipe. The cutting ball is leakage-free and can be operated with recycling water.

Applications

- Interlaced roots
- Mineral deposits
- Lime scale



CB70 1/2"

420.070A	1/2"	3 - 5	15	6 x M6	-	2.67 x 3.6	2.43	ok	2,900
420.070AS	1/2"	3 - 5	21	6 x M6	3 x M4	2.67 x 3.6	2.43	ok	2,900

CB90 1/2"

420.090A	1/2"	4 - 6	16	6 x M6	-	3.5 x 3.8	4.94	ok	2,900
420.090AS	1/2"	4 - 6	21	6 x M6	3 x M4	3.5 x 3.8	4.94	ok	2,900
425.090A	1/2"	4 - 6	16	6 x M6	-	3.5 x 3.8	4.94	ok	2,900
425.090AS	1/2"	4 - 6	21	6 x M6	3 x M4	3.5 x 3.8	4.94	ok	2,900

Accessory cutting balls

00420.0702	
------------	--

Impact milling cutters

These tools are a radical innovation for milling-off deposits in pipes. The enz® impact milling cutters are designed to remove the most stubborn deposits like concrete, injection cement, mineral deposits etc. They work with a percussion system of 600-3000 impulses per minute and up to 12 tons of impact force.

Please ask for special equipment for plastic deposits!

When using the pull rod (drawing device) the cutters can be driven with half the water quantity (from 7.9 inch).



Characteristics

- superior performance compared to other cutters
- extended tooth life
- easy handling
- low maintenance cost
- proven design

All impact milling cutters can be operated without impacts.

Applications

- To remove concrete, injection cement, calcareous layers etc.
- Ø 3.9 - 23.6 inch

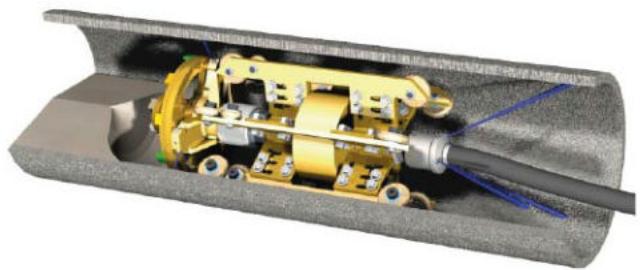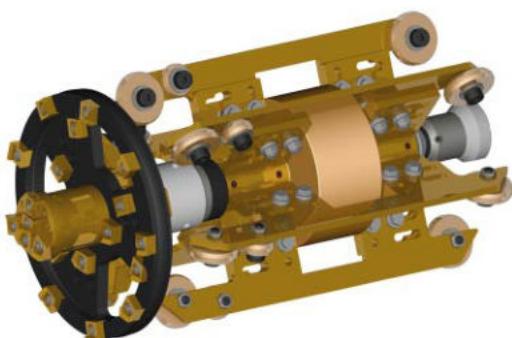

Impact milling cutters 1"


14.100	1"	4	26	3 x M10	3 x M10	-	3.5 x 13.6	26.46	-	2,100
14.120	1"	5	23	3 x M10	3 x M10	-	4.3 x 13.6	30.20	-	2,100
14.150	1"	6	40	3 x M10	3 x M10	-	5.1 x 15.4	47.18	-	2,100

Impact milling cutters 1" - 1 1/4"

14.400	1", 1 1/4"	16	79	3 x M10	3 x M10	-	14.8 x 22.0	196.21	-	2,100
14.450	1", 1 1/4"	18	106	3 x M10	3 x M10	-	16.7 x 28.0	235.90	-	2,100
14.500	1", 1 1/4"	20	119	3 x M10	3 x M10	-	18.7 x 28.0	244.71	-	2,100
14.600	1", 1 1/4"	24	132	3 x M10	3 x M10	-	22.6 x 28.0	264.56	-	2,100

Accessory and wearing parts impact milling cutters

0014.100D		Diamond crown	4	1.87
0014.150D		Diamond crown	6	4.96
0014.2007		Skid for cutter 7.8-9.8 inch	7.8 / 9.9	2.19
0014.200D		Diamond crown	8	6.61
0014.2257		skid for cutter head Ø225mm		
0014.250D		Diamond crown	10	6.83

					
0014.300D		Diamond crown	12		15.65
0014.350D		Diamond crown	14		
0014.120D		Diamond crown			
14.400K		Impact drilling cutter head 15.7"	16		26.46
14.450K		Impact drilling cutter head 17.7"	18		29.76
14.500K		Impact drilling cutter head 19.7"	20		37.48
14.600K		Impact drilling cutter head 23.6"	24		41.89
14.400NA		Hub for impact drilling cutter 15.7"	16 - 18		26.46
14.500NA		Hub for impact drilling cutter 19.7"	20		28.00
14.600NA		Hub for impact drilling cutter 23.6"	24		28.00
14.450KU		Adapter plates for skids 17.7"	18 - 24		35.27
0014.400D		Diamond crown	-> 14.400	16	34.52
14.2215ZS		Pull-rod M22x1.5 x 8"	8 - 24		2.21
15.ZKB		Center cap with bored hole			1.32
15.ZU		Universal tooth (all Ø)	4 - 24		0.18
15.ZHU		Carbide tooth for impact cutter	4 - 24		0.24
15.ZU-GSL		Impact segment tooth 25x25	4 - 24		0.11

					
15.Z1-100		Segment tooth for center for 14.100	4		0.13
15.Z1		Impact segment tooth for center	5 - 6		0.18
15.ZDSU-30		Diamond tooth	4 - 24	1.10x0.98x0.93	0.17
14.K04		Cam plate 0.15 inch per pc. with screws	till 6		1.01
14.K05		Cam plate 0.19 inch per pc. with screws	8 - 24		0.44
14.T1		Cup spring 0.14" - per pc.			0.22
14.G		Glide plate cutter 200 - 600			0.55
65212.08		Nord-Lock wedge lock washers M8			0.002
0014.30011		Extension for the shaft of impact milling			0.99
0014.3008		Additional weight to percussion milling cutter	12 - 24		14.88
14.D		Spacers for cutter heads per pair			0.65

Recycling IMC

These tools are a radical innovation for milling-off deposits in pipes. The enz® im-pact milling cutters are designed to remove the most stubborn deposits like concrete, injection cement, mineral deposits etc. They work with a percussion system of 600-3000 impulses per minute and up to 12 tons of impact force.

Please ask for special equipment for plastic deposits!

When using the pull rod (drawing device) the cutters can be driven with half the water quantity (from 7.9 inch).


Characteristics

- to use with recycling water
- superior performance compared to other cutters
- extended tooth life
- easy handling
- low maintenance cost
- proven design

All impact milling cutters can be operated without impacts.

Applications

- To remove concrete, injection cement, calcareous layers etc.
- Pipe diameter 7.9 - 13.7 inch

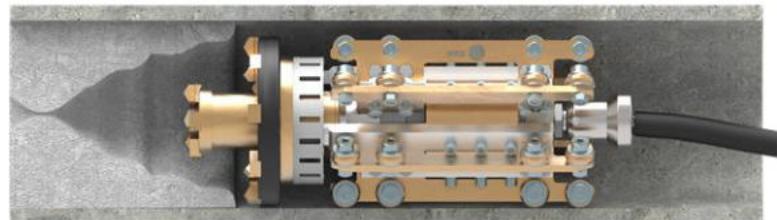

IMC 1" - 1 1/4"

14.200R	1", 1 1/4"	7.8	53	3 x M10	3 x M10	-	6.8 x 23.6	95.68	ok	2,100
14.225R	1", 1 1/4"	8.9	58.1	3 x M10	3 x M10	-	7.9 x 23.6	101.41	ok	2,100
14.250R	1", 1 1/4"	9.9	63.4	3 x M10	3 x M10	-	8.7 x 23.6	115.74	ok	2,100
14.300R	1", 1 1/4"	11.8	73.9	3 x M10	3 x M10	-	11.8 x 28	211.6	ok	2,100
14.350R	1", 1 1/4"	13.8	73.9	3 x M10	3 x M10	-	13.8 x 28	218.2	ok	2,100


Accessory and wearing parts IMC

15.ZKBR		Center cap with bored hole				1.32
14.ZSR		Pull-rod M16 x 1.5 x 12.4"				
14.300KR		Impact drilling cutter head 11.8"	12			16.54
14.200KR		Impact drilling cutter head 7.9"	8			8.16
14.225KR		Impact drilling cutter head 8.9"	9			8.16
14.250KR		Impact drilling cutter head 9.8"	10			12.13
L-14.375KR		Impact drilling cutter head 14.76"	14.76			
14.350KR		Impact drilling cutter head 13.8"	14			21.83
14.375KR		Impact drilling cutter head 14.76"	14.76			

15.ZU		Universal tooth (all Ø)	4 - 24			0.18	
15.ZHU		Carbide tooth for impact cutter	4 - 24			0.24	
15.ZU-GSL		Impact segment tooth 25x25	4 - 24			0.11	
15.Z1		Impact segment tooth for center	5 - 6			0.18	
15.ZDSU-30		Diamond tooth	4 - 24		1.10x0.98x0.93	0.17	
24.125S		Swivel joint with thrust jets	1" m - 1 1/4" f	3 x M10	3.2 x 5.0	4.08	3,600
14.99001		Torque wrench Stahlwille				0.24	
14.99002		Hex socket 3/4" SW 41				0.24	
14.99003		Socket adapter 3/4" - 1/2" with magnet				0.24	
14.99004		Hand lever grease gun Pressol				0.24	
14.KR35W		Cam plate to Impact Milling Cutter Recycling				0.79	
14.99005		Grease Motorex Plantogel 4000				0.24	

Round and fan jet nozzle inserts (enz® JetMax)

The stainless steel ceramic inserts stand out from the competition thanks to a very compact and aggressive water jet. The service life of a JetMax ceramic insert is many times longer than that of hardened steel nozzles or other hard materials. The inserts are available in a wide variety of diameters. The integrated jet stabilizer ensures a concentrated and high-energy water jet. The cleaning affect is greatly increased for the same amount of water and energy.

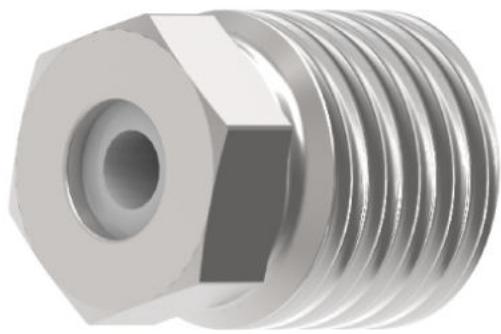

Round jet


22.025		Jet insert Ø 0.4 - 0.16 inch	G 1/4"	0.022	7,250
22.04		Jet insert Ø 0,01 - 0,06 inch	M4	0.022	22,000
22.06		Jet insert Ø 0,01 - 0,2 inch	M6	0.022	14,500
22.08		Jet insert Ø 0,04 - 0,13 inch	M8	0.022	22,000
22.10		Jet insert Ø 0,04 - 0,15 inch	M10 x 1	0.022	7,250

Fan jet

22.08F		Jet insert fan jet	M8	0.022	7,250
22.10F		Jet insert fan jet	M10 x 1	0.022	7,250
22.025F		Jet insert fan jet	G 1/4"	0.033	7,250

Bushings and extensions

enz® expansions (extensions) and reductions of various thread sizes are all made of stainless steel.

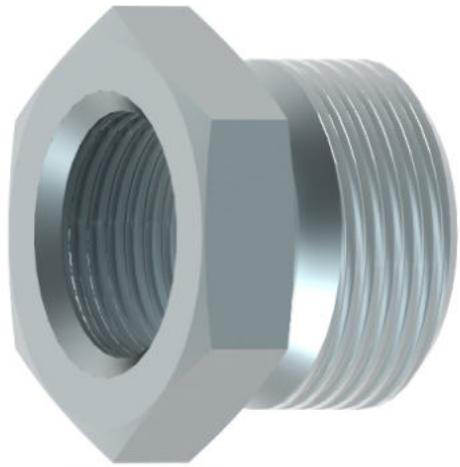

Bushings

			
19.M050F025N	Reduction bushing M 1/2" F 1/4" NPT	m 1/2 - f 1/4	0.110231
19.M050F038N	Reduction bushing M 1/2" F 3/8" NPT	m 1/2 - f 3/8	0.110231
19.M075F050	Reduction bushing M 3/4" F 1/2"	m 3/4 - f 1/2	0.2645544
19.M100F050	Reduction bushing M 1" F 1/2"	m 1 - f 1/2	0.220462
19.M100F062	Reduction bushing M 1" F 5/8"	m 1 - f 5/8	0.27778212
19.M100F075	Reduction bushing M 1" F 3/4"	m 1 - f 3/4	0.3417161
19.M125F100	Reduction bushing M 1 1/4" F 1"	m 1 1/4 - f 1	0.3417161
19.M150F100	Reduction bushing M 1 1/2" F 1"	m 1 1/2 - f 1	0.4078547
19.M150F125	Reduction bushing M 1 1/2" F 1 1/4"	m 1 1/2 - f 1 1/4	0.4078547

Extensions

			
19.M050F062	Extension bushing M 1/2" F 5/8"	m 1/2 - f 5/8	0.29321446
19.M050F075	Extension bushing M 1/2" F 3/4"	m 1/2 - f 3/4	0.29321446
19.M050F100	Extension bushing M 1/2" F 1"	m 1/2 - f 1	0.48722102
19.M075F100	Extension bushing M 3/4" F 1"	m 3/4 - f 1	0.51367646
19.M100F125	Extension bushing M 1" F 1 1/4"	m 1 - f 1 1/4	1.1904948
19.M100F150	Extension bushing M 1" F 1 1/2"	m 1 - f 1 1/2	1.322772
19.M100F40	Extension bushing M 1" F M40x2"	m 1 - f M40x2	0.771617

19.M125F150 Extension bushing M 1 1/4" F 1 1/2"	m 1 1/4 - f 1 1/2	1.34040896

Swivel joints

Rust proof, sturdy execution, smooth operation, with excellent flow dynamic, suitable for larger channel cleaning and for operating cutters.



Swivel joints 1/2" - 1 1/4"

24.050		Swivel joint	1/2" m - 1/2" f	-	1.65 x 3.15	1.17	3,600
24.075		Swivel joint	3/4" m - 3/4" f	-	2.32 x 2.91	2.70	3,600
24.100		Swivel joint	1" m - 1" f	-	2.95 x 3.15	4.85	3,600
24.125		Swivel joint	1 1/4" m - 1 1/4" f	-	2.36 x 4.76	3.02	3,600
24.150		Swivel joint	1 1/2" m - 1 1/2" f	-	3.31 x 3.78	5.95	3,600
24.125S		Swivel joint with thrust jets	1" m - 1 1/4" f	3 x M10	3.2 x 5.0	4.08	3,600

Spray guns

Enz has multiple range of spray guns in its program. The jet can change from a pointed to flat jet, where you can trigger the flow very slowly or you can use a maximum flow. This can accommodate water temperatures of up to 300 °F.



Spray guns



18.41		Spray gun with swivel SG-41	1/2"	2.6	37.4 x 7.9 x 1.8	2.65	-	4,350
18.42		Spray gun with swivel SG-42	3/8"	2.6	46.5 x 7.9 x 1.8	3.97	-	4,350
18.43		Spray gun with swivel SG-43	1/2"	2.6	43.3 x 7.9 x 1.8	4.63	ok	5,000
18.44		Spray gun with swivel SG-44	1/2"	2.6	42.1 x 7.9 x 1.8	4.19	-	2,900
18.45		Spray gun without swivel SG-45	1/2"	2.6	30.7	5.07		3,600

Accessories for spray guns



0018.4599		Repair kit to spray gun SG-45			
0018.439		Repair kit to spray gun SG-43			
0018.438		Shoulder support for SG-43 13.4-19.7"			1.5
0018.4542		Nozzle for lance Vario Ø 2.0mm			
0018.4543		Nozzle for lance Vario Ø 3.0mm			
22S025N13		Steel insert Ø 1.3mm	1/4" NPT		
22S025N17		Steel insert Ø 1.7mm	AG 1/4" NPT		
22S025N21		Steel insert Ø 2.1mm	1/4" NPT		
22S025N17F40		Steel insert fan jet Ø 1.7mm	AG 1/4" NPT		
22S025N27		Steel insert Ø 2.7mm	AG 1/4" NPT		



0018.429



Repair kit to spray gun
SG-41 SG-42 SG-44

Hose protection and accessories

enz® hose protection provides optimum protection for the hose's rubber or plastic coating against environmental influences. In addition to protective plastic hoses, enz® also sells rigid and flexible flex guides. Compared to traditional deflection slides and the plastic hose protection that cause heavy wear on the hoses, the rollers on the enz® flex guides last five times longer. These flex guides are also available in a flexible variant so that you do not always have to detach the nozzle.



Hose protection

91.05B		Flex guide for hoses with fix hanger	from 5.91	18.23 x 5.2 x 8.98	15.43
91.07B		Flex guide for hoses with fix hanger	from 11.81	22.8 x 5.2 x 10	20.28
91		Steel-Banane small	from 7.87	13.78 x 17.72	8.82
91A		Steel-Banane middle	from 7.87	23.62 x 26.38	11.33
91M		Steel-Banane extra small	from 5.91	11.81 x 14.57	5.6
91.05M		Flex guide miniatur for hoses	from 3.35	3.15 x 11.81	4.28
91.05		Flex guide for hoses with brackets	from 5.91	18.23 x 5.2 x 8.98	15.43
91.07		Flex guide for hoses	from 11.81	22.8 x 5.2 x 10	20.28

Accessories for hose protection

0090.10		Quick-Lock Element			
0090.40		Quick-Lock Element			
0090.90		Quick-Lock Element			
0091.0504					
0091.0504M					
0091.0505M		Quick-Lock Element			
0091.0514M		Quick-Lock Element			

0091.05700				
0091.05703		Plastic protection for flex guide		
91.0515		Flex guide for hoses 91.05		
91.0715		Flex guide for hoses 91.07		
0091.0515		Adapter for flex guide hoses		
0090.02		Extension for Art. 90	39.37	4.5
0090.03		Quick Lock Element		4.68
90		Deflection device for lower edge	157.48	
93		Deflection device 18 - 34 inch	17.72 - 31.50	
93.7		Rope clip for upper deflection device		0.02

Nozzle extension and accessories

The enz® safetyliners are based on a pipe-in-pipe solution and are designed in such a way that the threads cannot be screwed in with too much force. This has no impact on the water output. In many countries, it is actually mandatory to use safetyliners in order to prevent serious accidents during work.



Nozzle Extension

97.075-100		Safetyliner 3/4" - 3/4"	3/4"	max. 7.8	1.37 x 4.65	1.0	ok	5,000
97.075-200		Safetyliner 3/4" - 3/4"	3/4"	max. 15.6	1.37 x 8.55	1.6	ok	5,000
97.100-150		Safetyliner 1" - 1"	1"	max. 11.7	1.8 x 6.76	2.1	ok	5,000
97.100-200		Safetyliner 1" - 1"	1"	max. 15.6	1.8 x 8.71	2.6	ok	5,000
97.100-300		Safetyliner 1" - 1"	1"	max. 23.4	1.8 x 12.61	3.5	ok	5,000
97.125-150		Safetyliner 1 1/4" - 1 1/4"	1 1/4"	max. 11.7	2.08 x 6.84	1.2	ok	5,000
97.125-200		Safetyliner 1 1/4" - 1 1/4"	1 1/4"	max. 15.6	2.08 x 8.79	3.5	ok	5,000
97.125-300		Safetyliner 1 1/4" - 1 1/4"	1 1/4"	max. 23.4	2.08 x 12.7	4.7	ok	5,000
97.050-100		Safetyliner complete 1/2" -> 1/2"	1/2"	max. 7.8	1.06 x 4.57	0.70	ok	5,000
97.050-150		Safetyliner complete 1/2" -> 1/2"	1/2"	max. 11.7	1.06 x 6.52	0.9	ok	5,000

Threaded ring

0097.0503	Threaded ring 1/2"	1/2"	1.18 x 0.39	0.066	5076

High pressure hoses and accessories

enz® high pressure hoses were developed for high and ultra high pressure applications. They combine outstanding handling and a long service life with the highest level of safety. When working with short nozzles, short fittings are important in order to pass through all the bends, while enz® reels allow you to work in a tidy and efficient manner within buildings.



High pressure hoses



C173		HP Hose	1/8" m - 1/4" f	3/16" x 11yards	2.29	3,600
C174		HP hose	1/8" m - 1/4" f	3/16" x 16yards	3.39	3,600
C175		HP hose	1/8" m - 1/4" f	3/16" x 22yards	4.54	3,600
C176-20		HP hose	1/4" m - 1/2" f	1/4" x 22 yards	7.93	3,600
C176-30		HP hose	1/4" m - 1/2" f	1/4" x 33 yards	11.46	3,600
C177-30		HP hose	1/4" m - 1/2" f	5/16" x 33 yards	12.56	3,600


Accessories for high pressure hoses



A-22MF-04BM KAE		Hand adapter IG M22x1.5-AG 1/4"			0.22	
A-22MF-08BM KAE		Hand adapter IG M22x1.5-AG 1/2"			0.33	
C330		Hose Reel for Hose 1/4" and 1/8"	1/2"		9.7	
C331		Closure cap	1/4"		0.22	
C332		Closure cap	1/8"		0.22	

Maintenance

Regular maintenance and cleaning the nozzles daily prevents interruptions in operations and extends the service life of the nozzles. enz® sells various tools and products that come in handy when doing so. Reamers should never be used for cleaning.

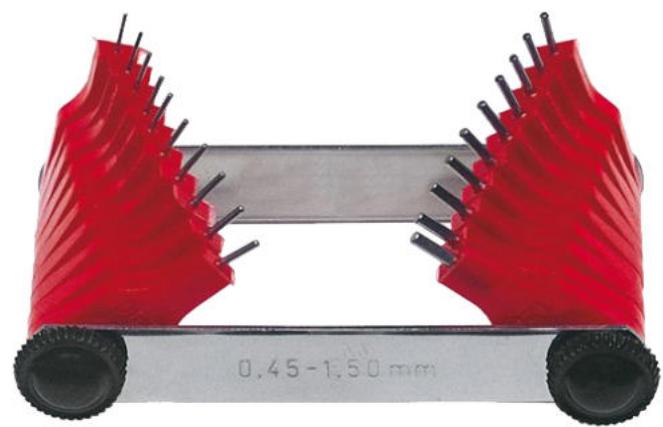


Maintenance tools & nozzle care

C104		Socket wrench 0.2 inch	0.15
C101		Socket wrench 0.2 inch	0.11
C131		Socket wrench 0.4 inch	0.05
C160		Socket wrench 0.3 inch	0.11
C149		Socket wrench 0.2 inch	0.15
C260		Socket wrench Futuro 0.28 inch	0.15
C261		Socket wrench 3.5 mm	0.11
C201		Nozzle gauge	0.44
C200		Nozzle gauge	0.66
C202		Set Nozzle Cleaning-Tool	0.06
C191		Oil Spray Bio, 500 ml	
C192		Loctite 243 - 50 ml	0.15
C109		Loctite 638 - 50 ml	
C227		Loctite 270 - 50 ml	

Toolboxes

Enz gives you the option to have a nozzle tool kit box for every jettter and water jetting truck. It's very flexible with the different types of nozzles and you can also add your logo on the lid. This option of organization can reduce the risk of lost or misplaced nozzles.

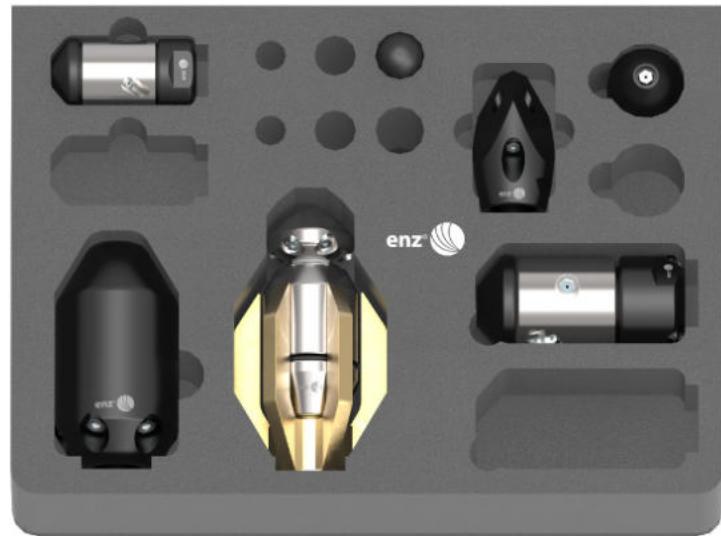

Toolboxes 1/8" - 1 1/4"

					
09.000012B		Box for 1/8" nozzles	1/8"	4.7 x 4.6x 1.6	0.23
09.000025B		Box for 1/4" nozzles	1/4"	4.7 x 4.6x 1.6	0.23
09.000038E		Case for 1/4" or 3/8" nozzles	1/4", 3/8"	10 x 8.3 x 2.4	0.78
09.001		Tool Case 1/2"	1/2"	11.81 x 10.83 x 4.13	1.10
09.003		Tool Case 3/4"	3/4"	15.35 x 11.81 x 7.28	4.19
09.004		Tool Case 1"	1"	19.49 x 16.14 x 7.09	6.17



JetCalc light

JetCalc light calculates the optimal match between the nozzle and the truck. Therefore, the nozzle will achieve its best performance with the truck specifications. You get the JetCalc light version free by downloading it from www.enzusainc.com.



JetCalc full version


This JetCalc version calculates the optimal components for our nozzles and figures in the pressure loss. This program is specially for enz® products. Other nozzle brands can also be calculated with this program.



JetCalc Nozzle Calculation Programm

Version 2.6.0 © 2016 ENZ USA INC, Aurora, IL 07.07.2017

Article	400.101A/B
Pump capacity	
Flow rate	100.0 US-G/min
Pressure	2'500.0 PSI
Hose system	
Without hose	
Calculated values	
Flow rate	99.2 US-G/min
Final pressure	2'500.0 PSI
Pressure loss	0.0 PSI
Traction approx.	144 lbs
Excess	0.8 US-G/min
Assembly	
	A = 3 x 1.7 mm
	B = 2 x 2.6 mm
	S = 6 x 1.9 mm
	Z = 0.0 mm
Advice(s)	All rotating tools must be tested! Rotational speed 3'000 - 7'000 r.p.m.

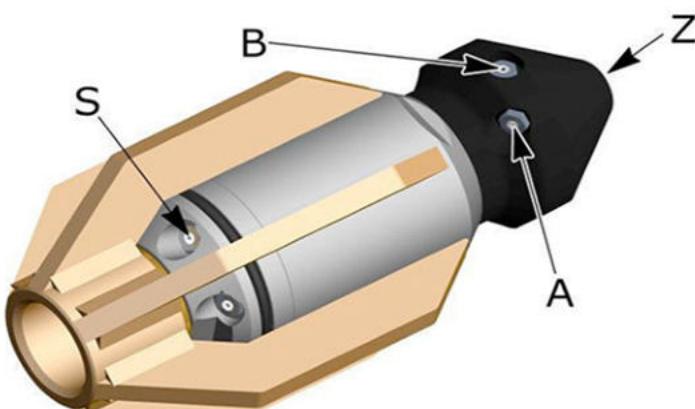



 **enz**[®] usa inc.

1585 Beverly Ct. - Unit 115, Aurora, IL 60502 - Phone 630-692-7880 / Fax 630-692-7885

Date:

30

Purchase Order:

Bill to Company:

Ship to Company:

All merchandise returned due to customer error or without proper authorization will be subject to a 15% re-stocking fee.

All requests must have the GPMs, PSI, hose type and hose length for the order to be complete.

Signature:

Datei:

enz® usa inc.
1585 Beverly Ct.
Unit 115
Aurora, IL 60502
Phone 630-692-7880
Fax 630-692-7885
salesusa@enz.com
www.enz.com

