



MAKE YOUR SMART CHOICE

SMART LIFT		2.40 SL		
Lifting capacity (lbs)		7000	8000	9000
Lifting/lowering time approx. (sec)		40/40	46/40	46/40
Lifting height (inch)		79"	81"	81"
Lowest lifting point (inch)	Version DT	3 3/4" - 5 1/2"	4 1/2" - 7 1/2"	-
	Version MINI-MAX	-	3 - 7 1/4"	-
	Version LoPro	-	3 1/4" - 4 3/4"	-
	Version UNIVERSAL	-	-	4 1/2" - 7 1/2"
Total height column (inch)		114"	114"	114"
Top connection (inch)		146 1/2" - 162 1/4"	145 - 164 1/8"	145 - 164 1/8"
Total width (inch)	Version DT	122	127	-
	Version MINI-MAX	130	132	132
	Version LoPro	-	132	-
	Version UNIVERSAL	-	-	132
Drive-through width (inch)	Version DT	99"	94 1/2"	-
	Version MINI-MAX	99"	99 1/4"	-
	Version LoPro	-	99 1/4"	-
	Version UNIVERSAL	-	-	99"
Column distance (inch)	Version DT	100 3/4"	104 3/8"	-
	Version MINI-MAX	108 5/8"	109	-
	Version LoPro	-	109	-
	Version UNIVERSAL	-	-	109
Arm-extraction long (inch)	Version DT	37 1/4" - 58 7/8"	37 - 58 7/8"	-
	Version MINI-MAX	39 3/8" - 58 1/4"	39 3/8" - 58 1/4"	-
	Version LoPro	-	33" - 54 3/8"	-
	Version UNIVERSAL	-	-	44 1/2" - 72 1/2"
Arm-extraction short (inch)	Version DT	18 7/8" - 34 1/4"	22 1/2" - 45 5/8"	-
	Version MINI-MAX	-	23 5/8" - 38 5/8"	23 5/8" - 38 5/8"
	Version LoPro	-	23 1/4" - 34"	-
	Version UNIVERSAL	-	-	22 1/2" - 45 5/8"
Motor (HP)		2 x 2	2 x 2	2 x 2

ACCESSORIES



Pad extension 3 5/32". Set = 4 units
Item no.: 0029159



Pad extension 5 33/64". Set = 4 units
Item no.: 0029161



U-Pad Set = 4 units
Item no.: 0029146

More accessories available

ELECTROMECHANICAL 2-POST LIFT

QUIET LIFT

THE SMART ORIGINAL



THE ORIGINAL NUSSBAUM LIFT

- ✓ Flexible in height: Ideal for low ceiling workshops
- ✓ Asymmetric lifting arms and carriage for optimal door clearance
- ✓ Small footprint - Saves space

9000 LBS

Techn. changes and errors excepted. | Valid from 04 2024 © Nussbaum Automotive Lifts Inc. | 177 Defense Highway Suite 7 | Annapolis, MD 21401 | USA
Tel.: (443) 833 3929 | info@nussbaum-usa.com | nussbaum-usa.com



NUSSBAUM is an established company from Germany now part of the Stertil Group. For more than 40 years our products are produced exclusively in Germany. Every product is thoroughly tested before leaving our facility. We are exceedingly proud to be one of the world's leading manufacturers of automotive lifts and workshop equipment. We have gained the reputation of being a true innovative leader.

facebook.com/nussbaumgroup
 youtube.com/nussbaumgroup





ELECTROMECHANICAL 2-POST LIFT

QUIET LIFT

Sturdy, reliable and ready

The QUIET LIFT is THE classic NUSSBAUM lift: it is the result of 40 years experience in the manufacturing of lifts. Featuring a tried and tested design. More than 100,000 units are installed worldwide.

SAFE


- ✓ Automatic locking of the arms
- ✓ Safety nut under the carrying nut
- ✓ Visual signal if carrying nut is in need of replacement

LONG LASTING

- ✓ Low wear Nylatron-nut guarantees a quiet operation
- ✓ Resistant and almost wear-free Poly-V belt

Minimal height of only 1/4"

The data and electric cable that connect the 2 columns can be installed above the columns or in the floor

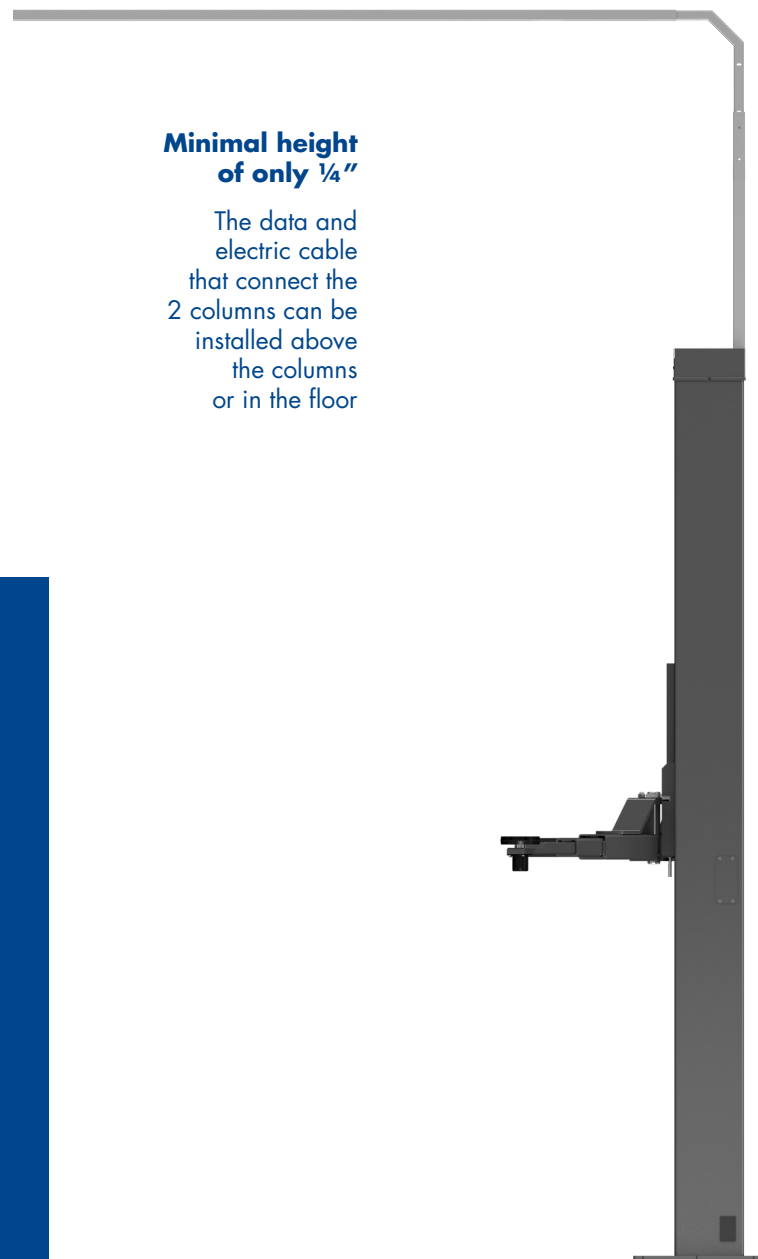

Lifting arm versions available

- For QUIET LIFT 7000 & 9000 lbs

DT (3 STAGE ARMS)

The short lifting arm has 3 stages, providing a large adjustable range and therefore enables to lift small and wide vehicles.

- For QUIET LIFT 8000 lbs only

MM (MINI-MAX ARMS)

Adapter for deep drawn side skirt and off-road vehicles. Quick vertical multilevel adjustment, hand and foot operated.

LOPRO ARMS


Extremely flat and sturdy arms made of solid material enable the lifting of very low and wide sports cars.

- For QUIET LIFT 9000 lbs

UNIVERSAL ARMS

Extended 3 stage lifting arms for lifting cars and vans up to Mercedes Sprinter with long wheelbase on alternative pick up points.

SMART LIFT: THE ONE LIFT YOU NEED

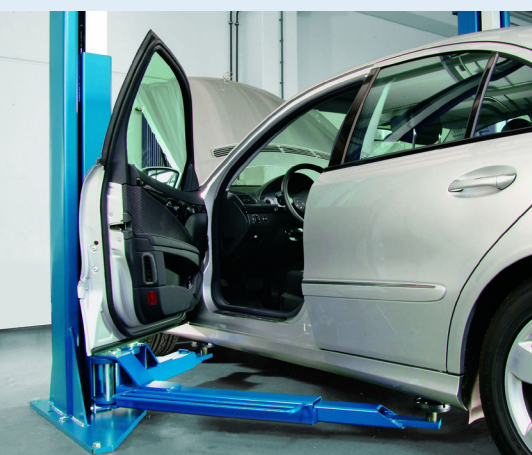

Wide opening of the vehicle's front doors



3 stage lifting arm



Mini-Max lifting arms : easy and convenient to lift off-road vehicles as well as low clearance vehicles



LoPro arms : extremely flat construction. Very sturdy, made of solid material. Especially suitable for very low and wide sports cars.

THE SMART CHOICE

- Flexible: No ground connection between columns and adjustable height of top connection
- Suitable for a large range of vehicles
- Distance between the columns of 96 5/8"
- Pick-up points starting at 3 1/4"
- Short lifting arms swivelling 180°